



Property Library for Ice, Water, and Steam

**FluidDYM
with LibICE
for DYMOLA®**

Prof. Hans-Joachim Kretzschmar

Dr. Sebastian Herrmann

Dr. Matthias Kunick

Property Library for Ice, Water, and Steam

Including DLL and Add-In for DYMOLA®

FluidDYM*Graphics* LibIce

Contents

- 0. Package Contents
 - 0.1 Zip-files for 32-bit Windows®
 - 0.2 Zip-files for 64-bit Windows®
- 1. Property Functions
 - 1.1 Property Functions of LibICE
 - 1.2 Range of Validity
- 2. Application of FluidDYM*Graphics* in DYMOLA®
 - 2.1 Installing FluidDYM*Graphics*
 - 2.2 Registering FluidDYM*Graphics* as Add-In in DYMOLA®
 - 2.3 The FluidDYM*Graphics* Help System
 - 2.4 Licensing the LibIce Property Library
 - 2.5 Example: Calculation of $h = f(p, t, x)$
 - 2.6 Removing FluidDYM*Graphics*
- 3. Program Documentation
- 4. Property Libraries for Calculating Heat Cycles, Boilers, Turbines, and Refrigerators
- 5. References
- 6. Satisfied Customers

© KCE-ThermoFluidProperties UG (with limited liability) & Co. KG
Professor Hans-Joachim Kretzschmar
Wallotstr. 3, 01307 Dresden, Germany
Phone: +49-351-27597860
Mobile: +49-172-7914607
Fax: +49-3222-4262250
Email: info@thermofluidprop.com
Internet: www.thermofluidprop.com

0 Package Contents

0.1 Zip file for 32-bit DYMOLA®

"CD_FluidDYM_LibICE.zip"

Including the following files:

FluidDYM_LibICE_Setup.exe	Installation Program for the FluidDYM Add-In for use in DYMOLA®
LibICE.dll	Dynamic Link Library f
FluidDYM_LibICE_Docu.pdf	User's Guide
Folder "Users_Guide"	Includes the complete User's Guide

0.2 Zip file for 64-bit DYMOLA®

"CD_FluidDYM_LibICE_64.zip"

Including the following files and folders:

Files:

Setup.exe	- Self-extracting and self-installing program for FluidLAB
FluidDYM_LibICE_64.msi	- Installation program for the FluidLAB Add-On for use in MATLAB®
LibICE.dll	- Dynamic Link Library for carbon dioxide for use in MATLAB®
FluidDYM_LibICE_Docu.pdf	- User's Guide

Folders:

vcredist_x64	- Folder containing the "Microsoft Visual C++ 2010 x64 Redistributable Pack"
WindowsInstaller3_1	- Folder containing the "Microsoft Windows Installer"

1. Property Functions

1.1 Property Functions of LibICE

Functional Dependence	Function Name	Fortran Program	Property or Function	Unit of the Result
$a = f(p, t, x)$	a_ptx_ICE	APTXICE(P,T,X)	Thermal diffusivity	m ² /s
$\alpha_v = f(p, t, x)$	alphav_ptx_ICE	ALPHAVPTXICE(P,T,X)	Isobaric cubic expansion coefficient	1/K
$c_p = f(p, t, x)$	cp_ptx_ICE	CPPTXICE(P,T,X)	Specific isobaric heat capacity	kJ/(kg K)
$c_v = f(p, t, x)$	cv_ptx_ICE	CVPTXICE(P,T,X)	Specific isochoric heat capacity	kJ/(kg K)
$\eta = f(p, t, x)$	eta_ptx_ICE	ETAPTXICE(P,T,X)	Dynamic viscosity (only for liquid and steam)	Pa s
$h = f(p, t, x)$	h_ptx_ICE	HPTXICE(P,T,X)	Specific enthalpy	kJ/kg
$\kappa = f(p, t, x)$	kappa_ptx_ICE	KAPPAPTXICE(P,T,X)	Isentropic exponent	-
$\kappa_T = f(p, t, x)$	kappaT_ptx_ICE	KAPPATPTXICE(P,T,X)	Isothermal compressibility	1/kPa
$\lambda = f(p, t, x)$	lambda_ptx_ICE	LAMBDAPTXICE(P,T,X)	Thermal conductivity	W/(m K)
$p_{\text{mel}} = f(t)$	pmel_t_08_ICE	PMEL_T_08_ICE(T)	Melting pressure	bar
$p_s = f(t)$	ps_t_97_ICE	PS_T_97_ICE(T)	Vapor pressure	bar
$p_{\text{sub}} = f(t)$	psub_t_08_ICE	PSUB_T_08_ICE(T)	Sublimation pressure	bar
$\rho = f(p, t, x)$	rho_ptx_ICE	RHOPTXICE(P,T,X)	Density	kg/m ³

Functional Dependence	Function Name	Fortran Program	Property or Function	Unit of the Result
$s = f(p, t, x)$	s_ptx_ICE	SPTXICE(P,T,X)	Specific entropy	kJ/(kg K)
$t = f(p, h)$	t_ph_ICE	TPHICE(P,H)	Backward function: Temperature from pressure and specific enthalpy	°C
$t = f(p, s)$	t_ps_ICE	TPSICE(P,S)	Backward function: Temperature from pressure and specific entropy	°C
$t_{\text{mel}} = f(p)$	tmel_p_08_ICE	TMEL_P_08_ICE(P)	Melting temperature	°C
$t_s = f(p)$	ts_p_97_ICE	TS_P_97_ICE(P)	Saturation temperature	°C
$t_{\text{sub}} = f(p)$	tsub_p_08_ICE	TSUB_P_08_ICE(P)	Sublimation temperature	°C
$u = f(p, t, x)$	u_ptx_ICE	UPTXICE(P,T,X)	Specific internal energy	kJ/kg
$v = f(p, t, x)$	v_ptx_ICE	VPTXICE(P,T,X)	Specific volume	m³/kg
$w = f(p, t, x)$	w_ptx_ICE	WPTXICE(P,T,X)	Isentropic speed of sound	m/s
$x = f(p, h)$	x_ph_ICE	XPHICE(P,H)	Backward function: Phase fraction from pressure and specific enthalpy	kg/kg
$x = f(p, s)$	x_ps_ICE	XPSICE(P,S)	Backward function: Phase fraction from pressure and specific entropy	kg/kg

Units:

p in bar
 t in °C
 x in kg/kg (Phase fraction; see description in the following)

Reference State:

$h = 0.0006118$ kJ/kg and $s = 0$ kJ/(kg K)
at $p_t = 6.11657 \cdot 10^{-3}$ bar and $t_t = 0.01$ °C (273.16 K)

Details on the Phase Fraction x

If the state point to be calculated is located in one of the single phase regions ice, liquid, superheated steam or gas, $x = -1$ must be entered as a pro-forma value. Here the backward functions will result in $x = -1$.

The two phase regions wet steam region, melting region and sublimation region (see log p - h diagram in Chapter 1.2) are divided automatically by the subprograms. Please consider the following facts:

1. Wet Steam Region ($0 \leq x \leq 1$):

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

When calculating properties of wet steam, a value between 0 and 1 ($x = 0$ for saturated liquid, $x = 1$ for saturated steam) has to be entered for x . In this case, the backward functions result in the appropriate value between 0 and 1 for x .

In this case it is adequate to enter either the given value for t and $p = -1000$, or the given value for p and $t = -1000$, plus the value for x between 0 and 1. If values for both p and t are entered when calculating wet steam, the program will consider p and t to be appropriate to represent the vapor pressure curve. If it is not the case the calculation for the quantity of the chosen function results in -1000 .

Wet steam region: Temperature ranges from $t_t = 0.01$ °C (273.16 K) to $t_{\max} = 350$ °C (623.15 K)

Pressure ranges from $p_t = 6.11657 \cdot 10^{-3}$ bar to $p_s(t_{\max}) = 165.291643$ bar

2. Melting Region ($10 \leq x \leq 11$):

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit is (kg solidified liquid)/(kg melt), whereas melt is a

mixture of melting ice and solidified liquid.

When calculating properties of the melting region, a value between 10 and 11 ($x = 10$ for melted solid, $x = 11$ for solidified liquid) has to be entered for x . In this case, the backward functions result in the appropriate value between 10 and 11 for x .

In this case it is adequate to enter either the given value for t and $p = -1000$, or the given value for p and $t = -1000$, plus the value for x between 10 and 11. If values for both p and t are entered, the program will consider p and t to be appropriate to represent the melting pressure curve. If it is not the case the calculation for the quantity of the chosen function results in -1000 .

Melting region: Temperature ranges from $t_{\text{mel}}(p_{\max}) = -8.9412$ °C (264.2088 K) to $t_t = 0.01$ °C (273.16 K)

Pressure ranges from $p_t = 6.11657 \cdot 10^{-3}$ bar to $p_{\max} = 1000$ bar

3. Sublimation Region ($100 \leq x \leq 101$):

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{\text{gas}}}{(m_{\text{ice}} + m_{\text{gas}})}$. Its unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimated ice and desublimated gas.

When calculating properties of sublimation region, a value between 100 and 101 ($x = 100$ for sublimated ice, $x = 101$ for desublimated gas) has to be entered for x . In this case, the backward functions result in the appropriate value between 100 and 101 for x .

In this case it is adequate to enter either the given value for t and $p = -1000$, or the given value for p and $t = -1000$, plus the value for x between 100 and 101. If values for both p and t are entered, the program will consider p and t to be appropriate to represent the sublimation pressure curve. If it is not the case the calculation for the quantity of the chosen function results in -1000 .

Sublimation region: Temperature ranges from $t_{\text{min}} = -223.15 \text{ °C}$ (50 K) to $t_t = 0.01 \text{ °C}$ (273.16 K)
 Pressure ranges from $p_{\text{min}} = p_{\text{sub}}(t_{\text{min}}) = 1.9349584868 \cdot 10^{-45} \text{ bar}$ to $p_t = 6.11657 \cdot 10^{-3} \text{ bar}$

Note:

If the input values are located outside the range of validity, the calculated function will always result in -1000 . Please find more exact details on every function and its corresponding range of validity in the enclosed program documentation in Chapter 3. The same information may also be accessed via the online help pages.

1.2 Range of Validity of LibICE

The LibICE property library calculates the thermodynamic and transport properties of ice Ih, water and steam. As shown in the following p - T and log p - h diagrams, different formulations are used to describe the entire Range of validity of LibICE.


The thermodynamic properties of ice Ih are calculated by the IAPWS Formulation 2006 [7]. This region is marked with green color in the following log p - T diagram. This region ranges from minimum pressure to maximum pressure and from minimum temperature to the melting temperature for pressures $p \geq p_t$ and to the sublimation temperature for pressures $p < p_t$. The melting and sublimation pressures are calculated from the IAPWS 2008 Formulation [8].

The liquid-water region ranges from triple point pressure to maximum pressure and from melting temperature to saturation temperature for $p \leq p_s(T_{\max})$ and the maximum temperature for $p > p_s(T_{\max})$. In this region, the fundamental equation of IAPWS-IF97 Region 1 [1,2] is used. This region is marked with blue color in the following p - T diagram.

The vapor region covers the range from minimum pressure to saturation pressure and from triple point temperature to the maximum temperature for pressures $p < p_t$ and from saturation temperature to maximum temperature for pressures $p \geq p_t$. The thermodynamic properties are calculated by the fundamental equation of IAPWS-IF97 Region 2 [1,2]. This region is marked with light red color in the following p - T diagram.


The red region in the p - T diagram is covered by the Scientific Formulation IAPWS-95 [6]. This region covers the range from minimum pressure to the sublimation pressure and from sublimation temperature to the triple point temperature.

For given property values, the region is chosen automatically by the subprograms. The two-phase regions wet steam region, melting region and sublimation region are also chosen automatically.

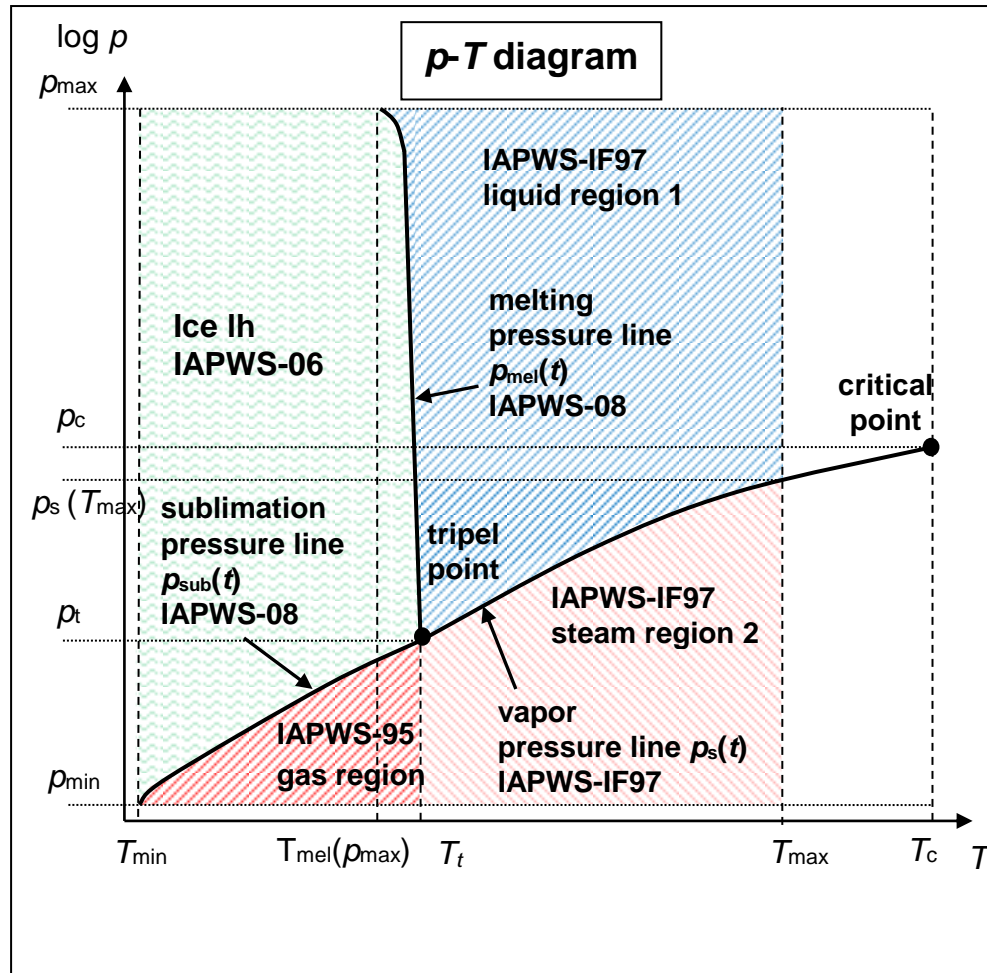

Values at Important State Points

Property	Variable	Value and Unit
Minimum temperature	T_{min}	50 K (– 223.15 °C)
Maximum temperature	T_{max}	623.15 K (350 °C)
Triple temperature	T_t	273.16 K (0.01 °C)
Temperature at the critical point	T_c	647.096 K (373.946 °C)
Melting temperature at maximum pressure	$T_{\text{mel}}(p_{\text{max}})$	264.2088 K (–8.9412 °C)
Minimum pressure	$p_{\text{min}} = p_{\text{sub}}(T_{\text{min}})$	$1.9349584868 \cdot 10^{-46}$ MPa
Maximum pressure	p_{max}	100 MPa
Triple pressure	p_t	$6.11657 \cdot 10^{-4}$ MPa
Pressure at the critical point	p_c	22.064 MPa
Vapor pressure at maximum temperature	$p_s(T_{\text{max}})$	16.5291643 MPa

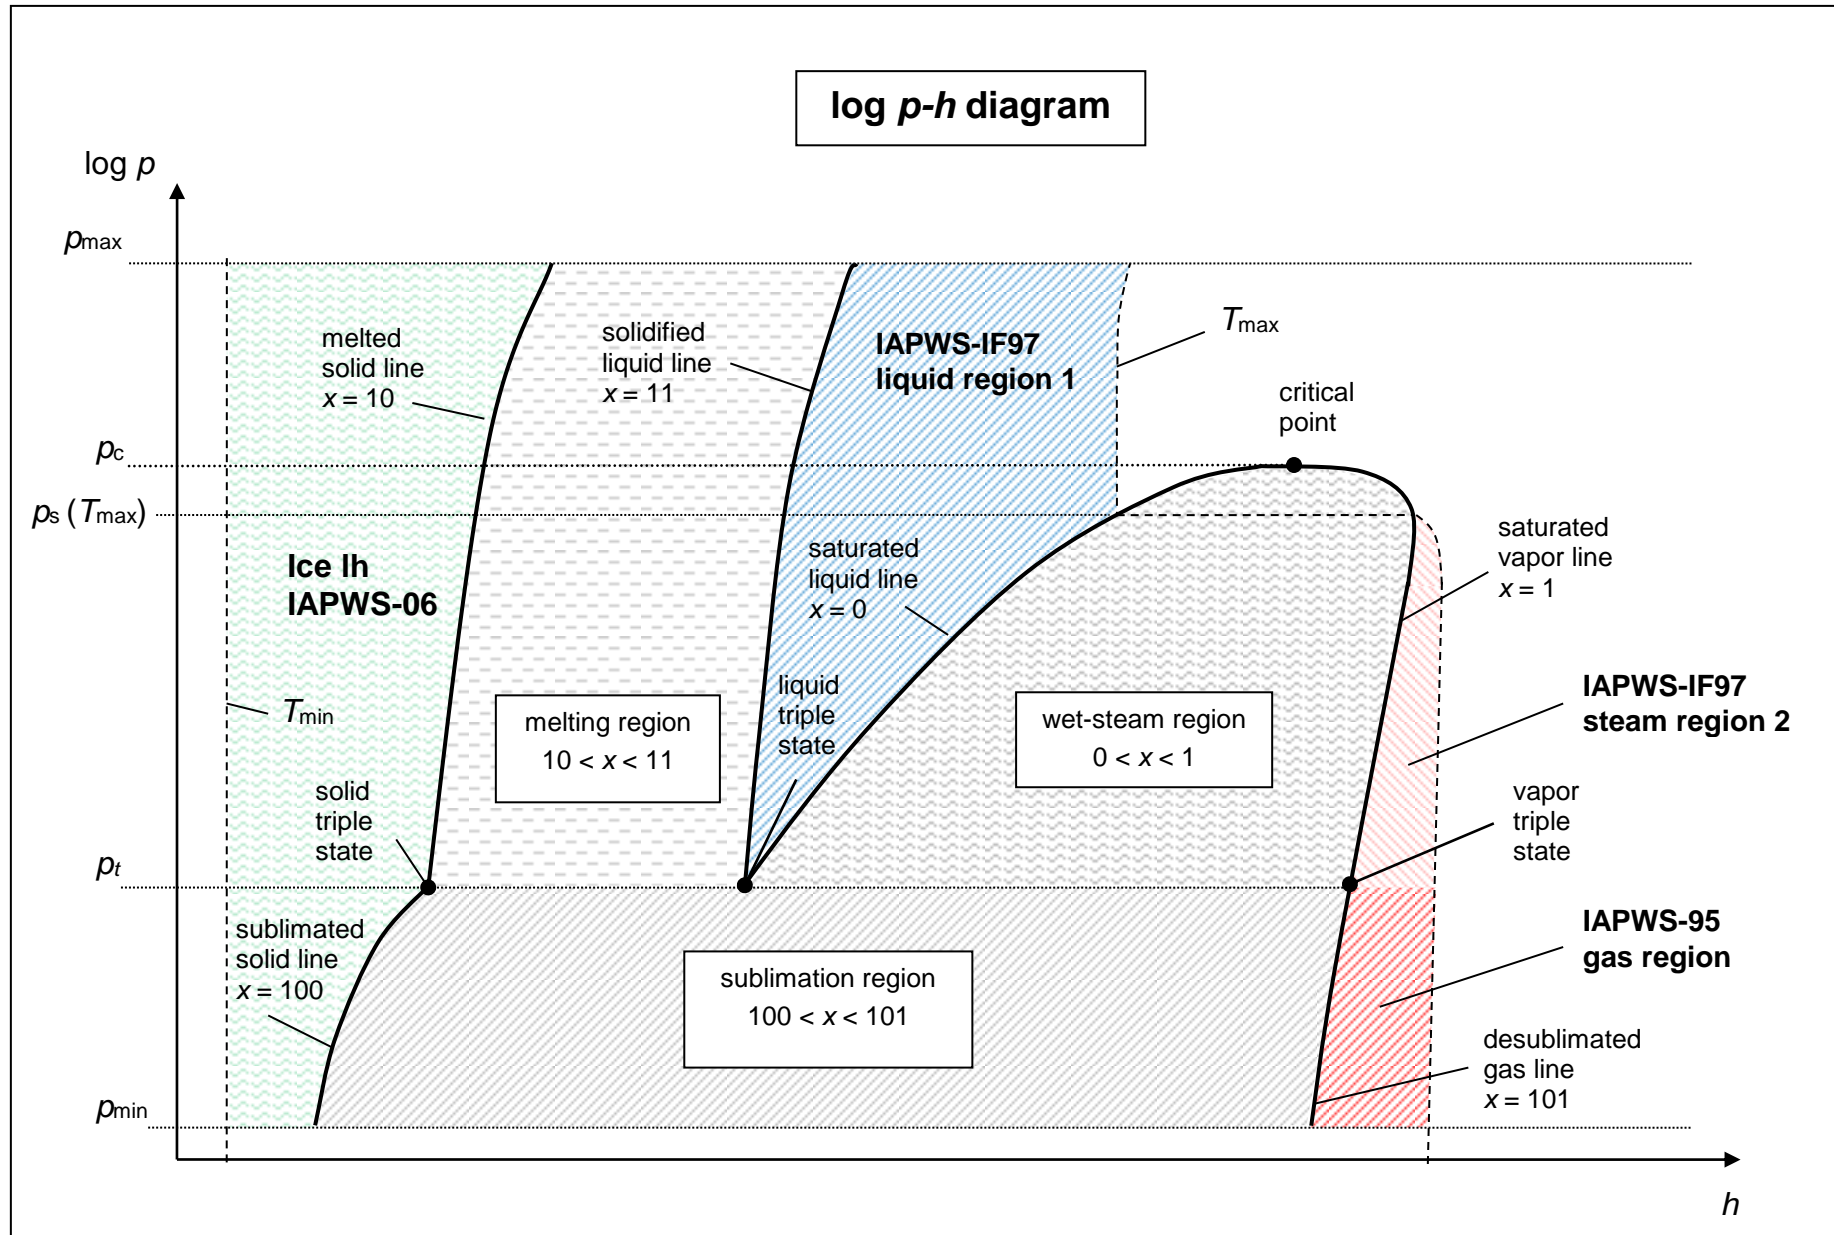

2. Application of FluidDYM in Dymola®

The FluidDYM Add-In has been developed to calculate thermodynamic properties in Dymola® more conveniently. Within Dymola® it enables the direct call of functions relating to water and steam from the LibICE property library. The 32-bit version of FluidDYM LibICE runs on both the 32-bit and 64-bit version of DYMOLA®.

2.1 Installing FluidDYM

In this section, the installation of FluidDYM and LibICE is described.

Before you begin, it is best to close any Windows® applications, since Windows® may need to be rebooted during the installation process.

After you have downloaded and extracted the zip-file

"CD_FluidDYM_LibICE.zip," (32-bit version)

"CD_FluidDYM_LibICE_64.zip," (64-bit version)

you will see the folder

CD_FluidDYM_LibICE (32-bit version)

CD_FluidDYM_LibICE_64 (64-bit version)

in your Windows Explorer®, Norton Commander® etc.

Now, open this folder by double-clicking on it.

Within the folder for the **32-bit version** you will see the following files

FluidDYM_LibICE_Users_Guide.pdf

FluidDYM_LibICE_Setup.exe (32-bit version)

and the folder

"Users_Guide."

Within the folder for the **64-bit version** you will see the following files

FluidDYM_LibICE_Users_Guide.pdf

FluidDYM_LibICE_64_Setup.msi

Setup.exe

and the folder

"Users_Guide."

In order to run the installation of **32-bit** FluidDYM including the LibICE property library double-click the file

FluidDYM_LibICE_Setup.exe.

Installation may start with a window noting that all Windows® programs should be closed. When this is the case, the installation can be continued. Click the "Continue" button.

In the following dialog box, "Choose Destination Location," the default path offered automatically for the installation of FluidDYM is

C:\Program Files\FluidDYM\LibICE.

By clicking the "Browse..." button, you can change the installation directory before installation (see figure below).

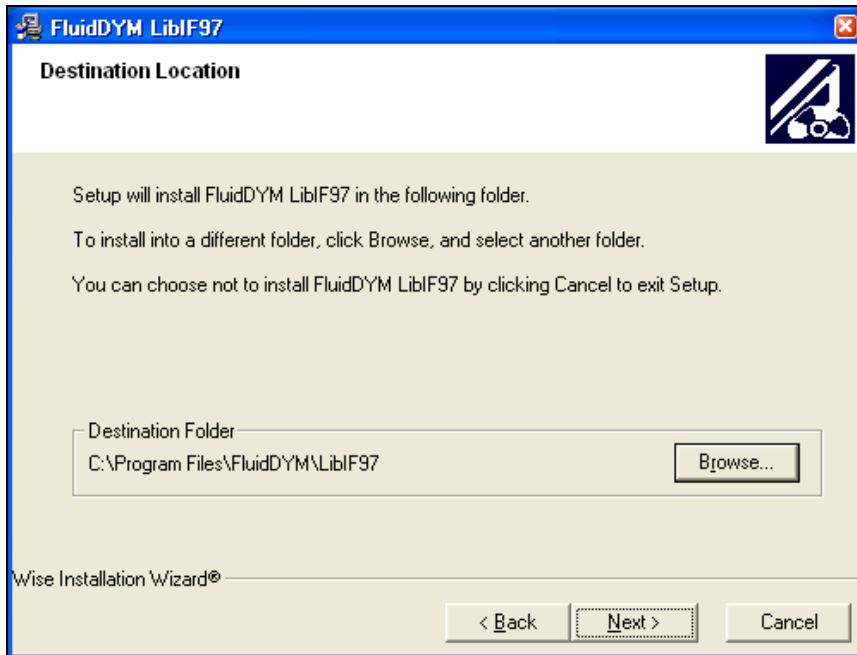


Figure 2.1: Dialog window "Destination Location"

Finally, click on "Next >" to continue installation; click "Next >" again in the "Start Installation" window which follows in order to start the installation of FluidDYM.

After FluidDYM has been installed, you will see the sentence "FluidDYM LibICE has been successfully installed." Confirm this by clicking the "Finish" button.

The installation of FluidDYM 32-bit has been completed.

In order to run the installation of **64-bit** FluidDYM including the LibICE property library double-click the file

Setup.exe.

Installation may start with a window noting that all Windows® programs should be closed. When this is the case, the installation can be continued. Click the "Continue" button.

In the following dialog box, "Choose Destination Location," the default path offered automatically for the installation of FluidDYM is

C:\Users\...\Documents\FuildDYM_64\LibICE.

By clicking the "Browse..." button, you can change the installation directory before installation (see figure below).

Finally, click on "Next >" to continue installation; click "Next >" again in the "Start Installation" window which follows in order to start the installation of FluidDYM.

After FluidDYM has been installed, you will see the sentence "FluidDYM LibICE has been successfully installed." Confirm this by clicking the "Finish" button.

The installation of FluidDYM 64-bit has been completed.

The installation program has copied the following files into the directory

C:\Program Files\FluidDYM\LibICE (for English version of Windows)
 C:\Programme\FluidDYM\LibICE (for German version of Windows)):

- Dynamic link library "LibICE.dll"
- Folder "Users_Guide"
- Link up Dynamic link library "LibICE_Dymola.dll" and other necessary system DLL files
- Library File "LibICE_Dymola.lib"
- Header File "LibICE_Dymola.h" and other necessary system DLL files
- Modelica File "FluidDYM_LibICE.mo", includes the following property functions:

a_ptx_97	p_vh_97
alphap_ptx_97	p_vu_97
alphav_ptx_97	Prandtl_ptx_97
b_p_97	ps_t_97
b_t_97	rho_ptx_97
betap_ptx_97	s_ph_97
cp_ptx_97	s_ptx_97
cv_ptx_97	sigma_p_97
deltat_ptx_97	sigma_t_97
dv_dp_T_ptx_97	t_hs_97
dv_dT_p_ptx_97	t_ph_97
e_ptx_97	t_ps_97
epsilon_ptx_97	t_vh_97
eta_ptx_97	t_vu_97
f_ptx_97	ts_p_97
fug_ptx_97	u_ptx_97
g_ptx	v_ph_97
h_ps_97	v_ps_97
h_ptx_97	v_ptx_97
kappa_ptx_97	w_ptx_97
kappat_ptx_97	x_hs_97
lambda_ptx_97	x_ph_97
my_ptx_97	x_ps_97
n_ptxwl_97	x_vh_97
ny_ptx_97	x_vu_97
p_hs_97	z_ptx_97

Now, you have to overwrite the file "LibICE.dll" and the folder "Users_Guide" in your LibICE directory with the files of the same names provided in your CD folder with FluidDYM.

To do this, open the CD folder "CD_FluidDYM_LibICE" in "My Computer" and click on the file "LibICE.dll" in order to highlight it. Hold Ctrl and click on the folder "Users_Guide" to mark it as well.

Then click on the "Edit" menu in your Explorer and select "Copy".

Now, open your LibICE directory (the standard being

C:\Program Files\FluidDYM\LibICE (for English version of Windows)
C:\Programme\FluidDYM\LibICE (for German version of Windows))

and insert the "LibICE.dll" and the "Users_Guide" folder by clicking the "Edit" menu in your Explorer and then select "Paste".

Answer the question whether you want to replace the files by clicking the "Yes" button. Now, you have overwritten the file "LibICE.dll" and the folder "Users_Guide" successfully.

2.2 Licensing the LibICE Property Library

The licensing procedure has to be carried out when Dymola® is running and a model simulation starts. In this case, you will see the "License Information" window (see Figure 2.2).

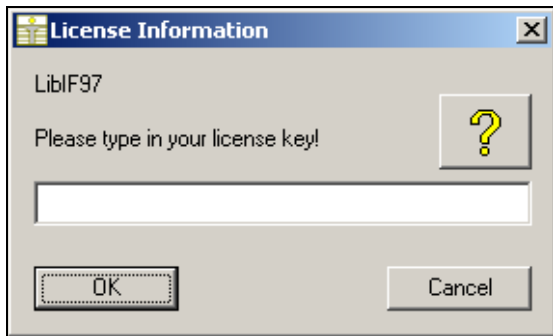


Figure 2.2: "License Information" window

Here you will have to type in the license key which you have obtained from the Zittau/Goerlitz University of Applied Sciences. You can find contact information on the "Content" page of this User's Guide or by clicking the yellow question mark in the "License Information" window. Then the following window will appear:

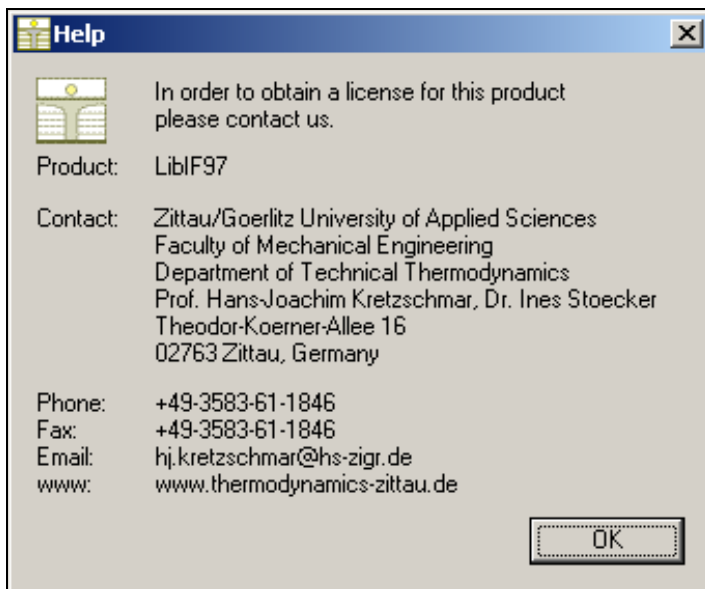


Figure 2.3: "Help" window

If you do not enter a valid license it is still possible to use Dymola® by clicking "Cancel". In this case, the LibICE property library will display the result "-11111111" for every calculation. The "License Information" window will appear every time you start Dymola.

Should you not wish to license the LibICE property library, you have to uninstall the FluidDYM LibICE property library following the description in section 2.4 of this User's Guide.

2.3 Example: Calculation of $h = f(p, t, x)$

Now we will calculate, step by step, the specific enthalpy h of Ice as a function of pressure p , temperature t and vapor fraction x , using Dymola®.

Please carry out the following instructions:

- Start Windows Explorer®, Total Commander®, My Computer or another file manager program.
The description here refers to Windows Explorer.
- Your Windows Explorer should be set to Details for a better view. Click the "View" (Ansicht) button and select "Details".
- Switch into the program directory of FluidDYM in which you will find the folder "\LibICE"; the standard location is: "C:\Program Files\FluidDYM\LibICE"
- Create the folder "\LibICE_Example" by clicking on "File" in the Explorer menu, then "New" in the menu which appears, and then selecting "Folder". Name the new folder "\LibICE_Example".
- You will see the following window:

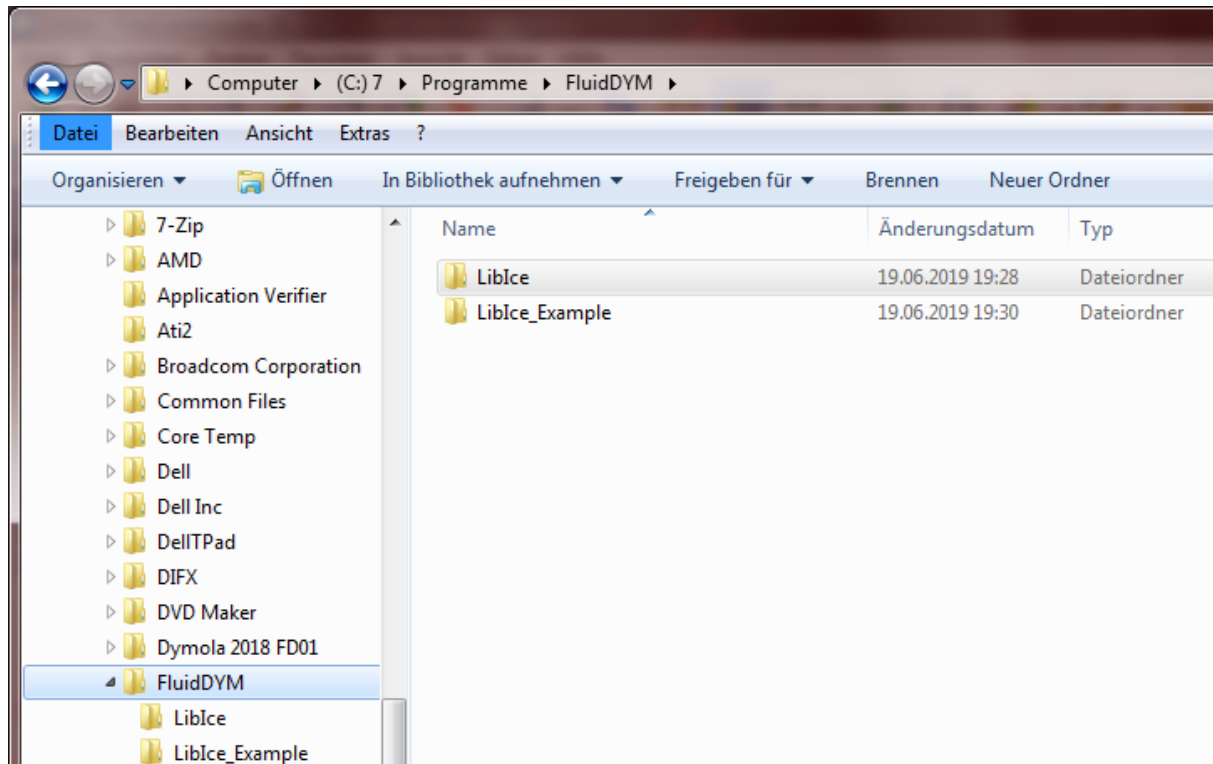


Figure 2.4: Highlighted *LibICE_Example* directory in FluidDYM

- Switch into the directory "\LibICE" within "\FluidDYM", the standard being: "C:\Program Files\FluidDYM\LibICE".

- You will see the following window:

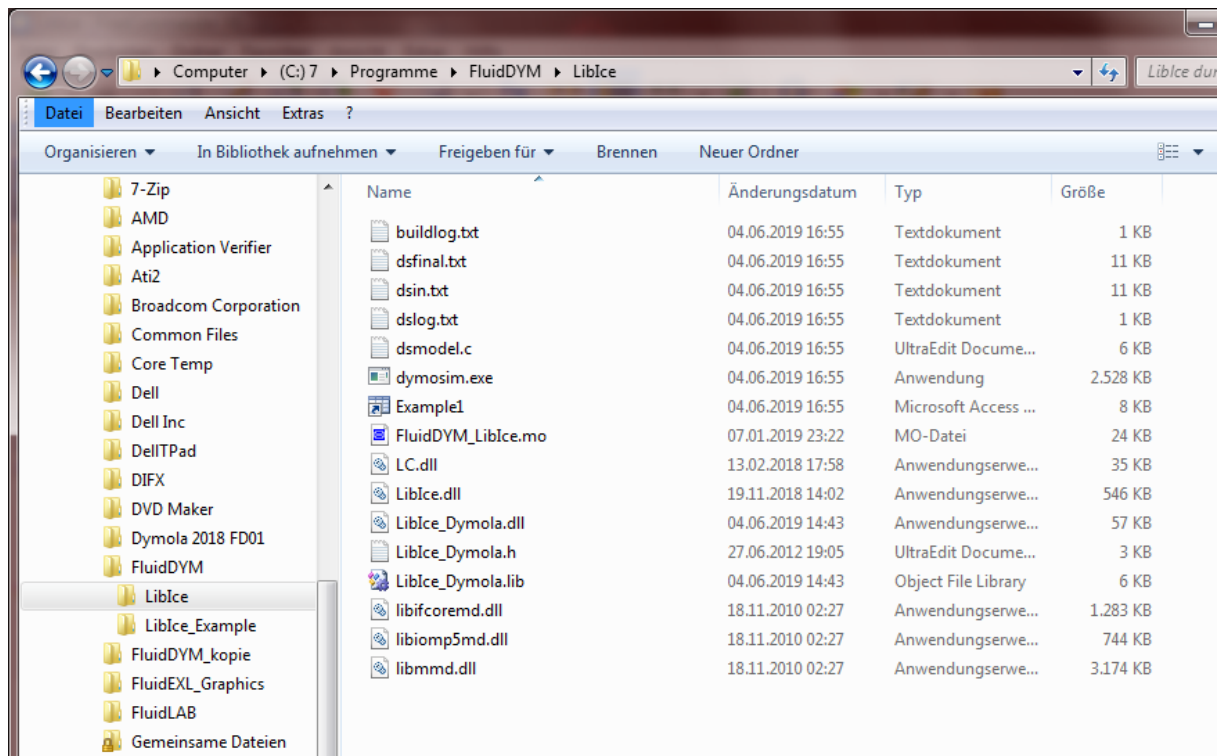


Figure 2.5: *LibICE* directory including installed files

In order to calculate the function $h = f(p, t, x)$, the following files are necessary. Copy them into the directory "C:\Program Files\FluidDYM\LibICE_Example":

- "advapi32.dll"
 - "Dformd.dll"
 - "Dforrt.dll"
 - "FluidDYM_LibICE.mo"
 - "LC.dll"
 - "LibICE.dll"
 - "LibICE_Dymola.dll"
 - "LibICE_Dymola.h"
 - "LibICE_Dymola.lib"
 - "msvc60.dll"
 - "Msvcr7.dll"
 - the folder "Users_Guide"
- Mark up these files, then click "Edit" in the upper menu bar and select "Copy".
 - Switch into the directory "C:\Program Files\FluidDYM\LibICE_Example", click "Edit" and then "Paste".

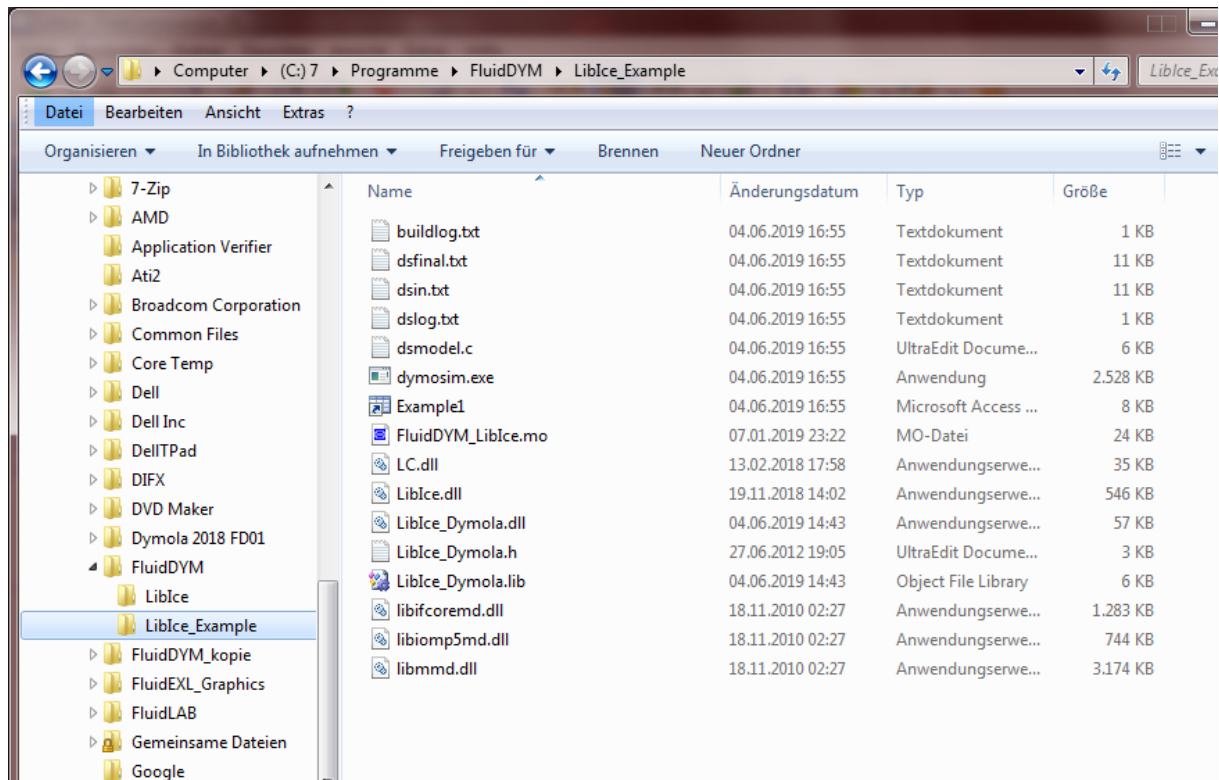


Figure 2.6: *LibICE_Example* directory including the newly-copied files

- Start Dymola®.
- Now click on "File" in the Dymola® menu bar and select "Open" (see Figure 2.7).

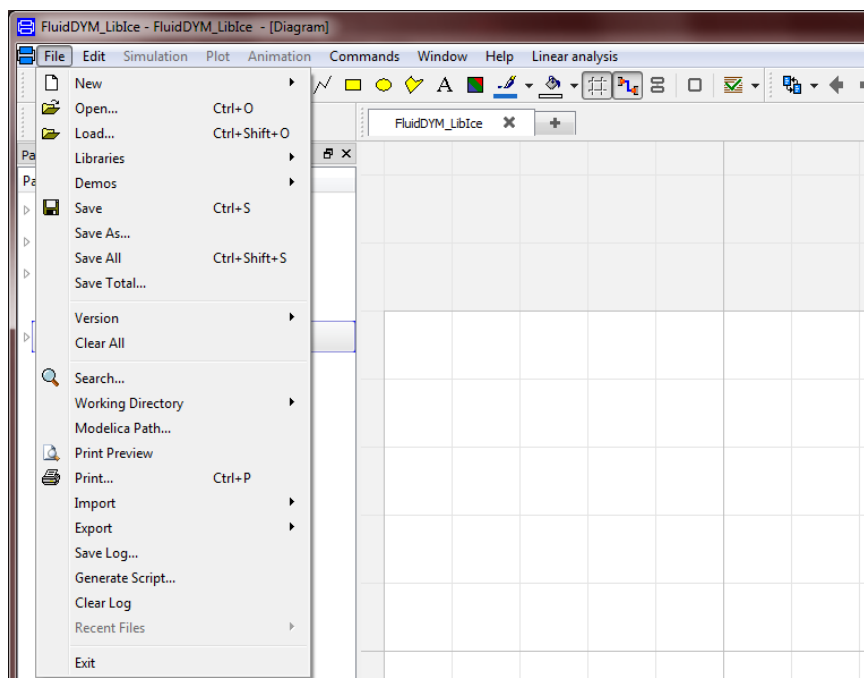


Figure 2.7: Selecting the menu entry "Open"

- Search and click on the directory "C:\Program Files\FluidDYM\LibICE_Example" in the pop-up menu.

- Select the "FluidDYM_LibICE.mo" file and click on the "Open" button (see Figure 2.8).

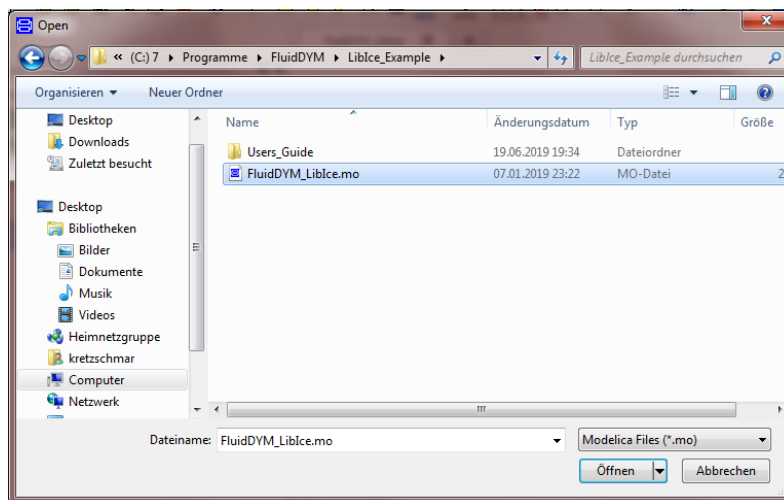


Figure 2.8: Selecting the *FluidDYM_LibICE.mo* file

- The library will be loaded by Dymola which may take a few seconds.
- After Dymola has finished loading the LibICE library, you will see the window shown in Figure 2.9.

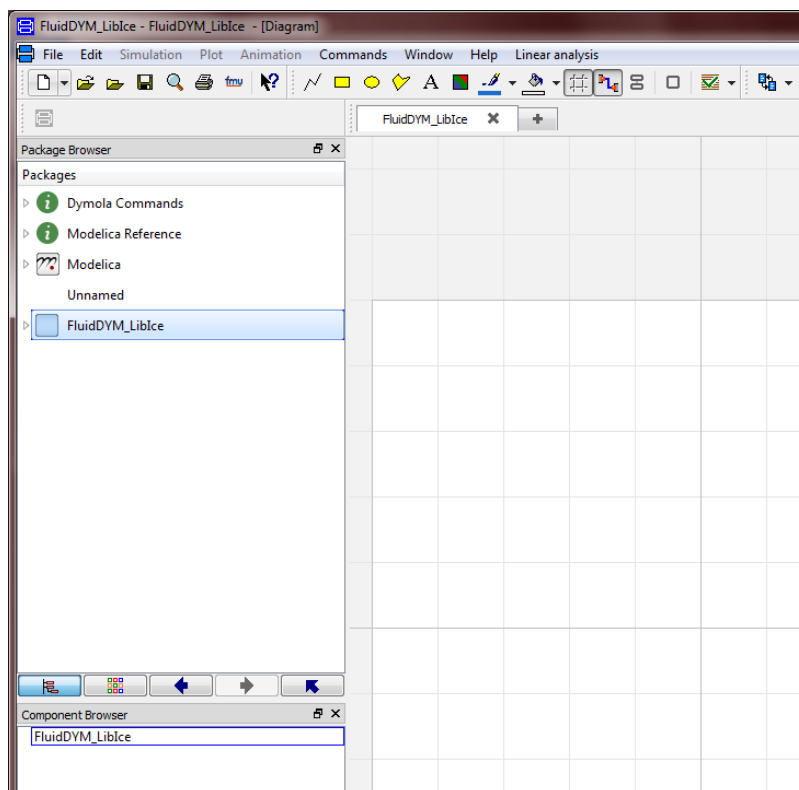


Figure 2.9: Dymola window after loading the *LibICE* library

- Now, click on "File" in the Dymola menu bar and select "Change Directory..." in order to open the folder "\LibICE_Example" (see Figure 2.10).

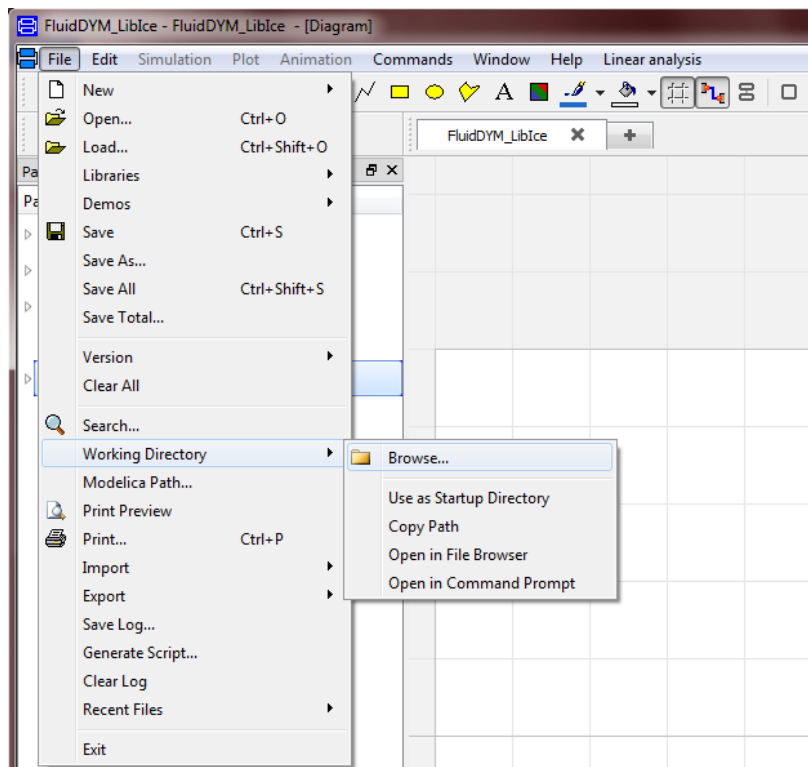



Figure 2.10: Selecting the menu entry "Change Directory..."

- Search and click on the directory "C:\Program Files\FluidDYM\LibICE_Example" in the pop-up menu.
- Confirm your selection by clicking the "OK" button.

As indicated in the table of property functions in Chapter 1, you have to call up the function "h_ptx_ICE" as follows for calculating $h = f(p, t, x)$.

- Click on the Dymola-Block "Testmodelle," which can be found in the FluidDYM_LibICE package in the "Package Browser" on the left hand side of the Dymola window. Here choose Example1 by double-clicking on it.
- Now click on the  button in the Dymola menu bar in order to switch to the Diagram Mode. You will see the following window:

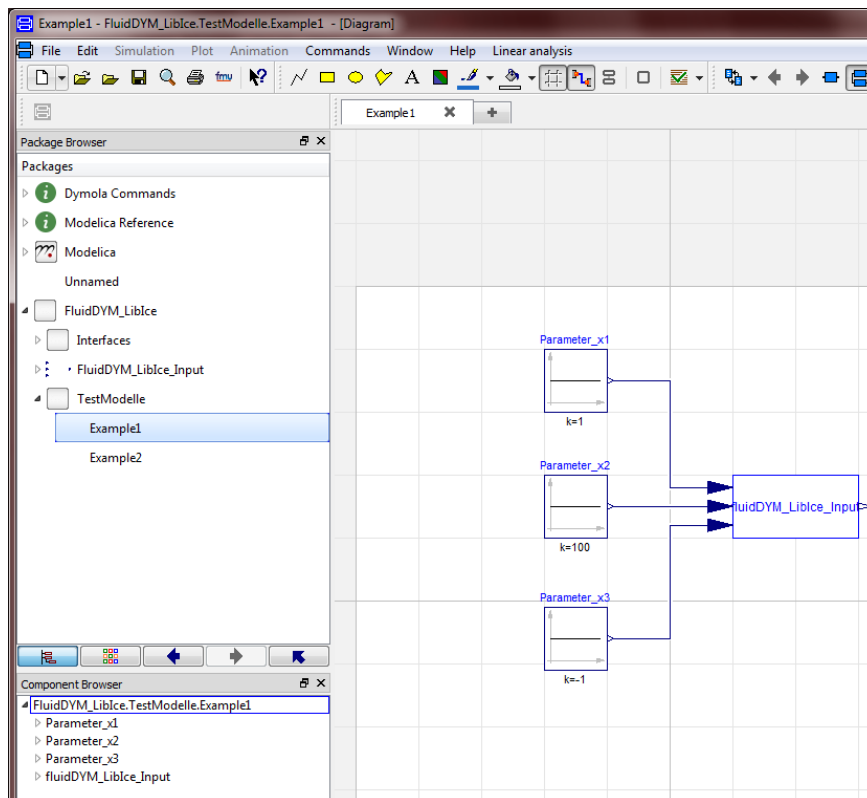


Figure 2.11: Dymola in Diagram Mode

- Now double-click on the "fluidDYM_LibICE_Input" block on the right hand side of the Dymola window.
- Search and click the "h_ptx_ICE" function next to "Function Number" in the pop-up menu (see Figure 2.12).

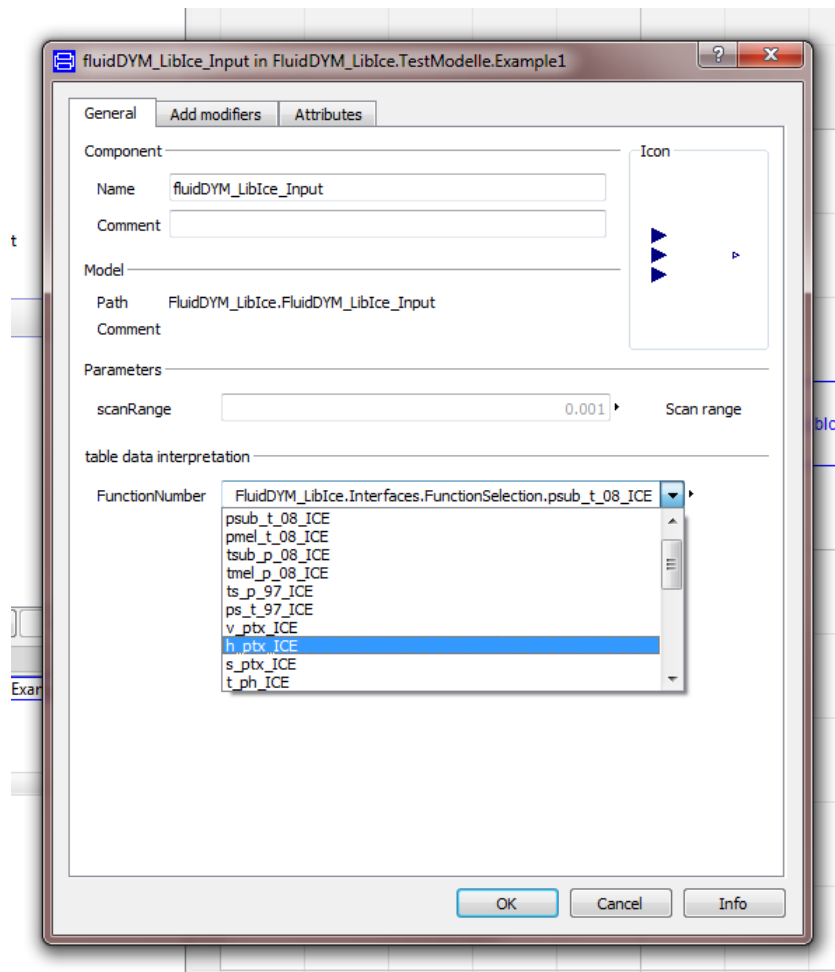


Figure 2.12: Choosing the function h_{ptx_ICE}

- You can set the scan range (how many times the property will be calculated per second) next to "scanRange". The preset value 0.001 means that the property will be calculated 1000 times per second. E.g. if you enter the value 1, the property will be calculated once per second. Do not change the preset value of 0.001 for our example calculation.
- Now we will configure the input parameters x_1 to x_3 , where x_1 represents the pressure p , x_2 represents the temperature t , and x_3 represents the vapor fraction x . When calculating a function with only two input parameters, the third input parameter x_3 will not be defined.
- First, double click on the "Parameter_x1" block which represents the first input parameter, here the pressure p in bar.

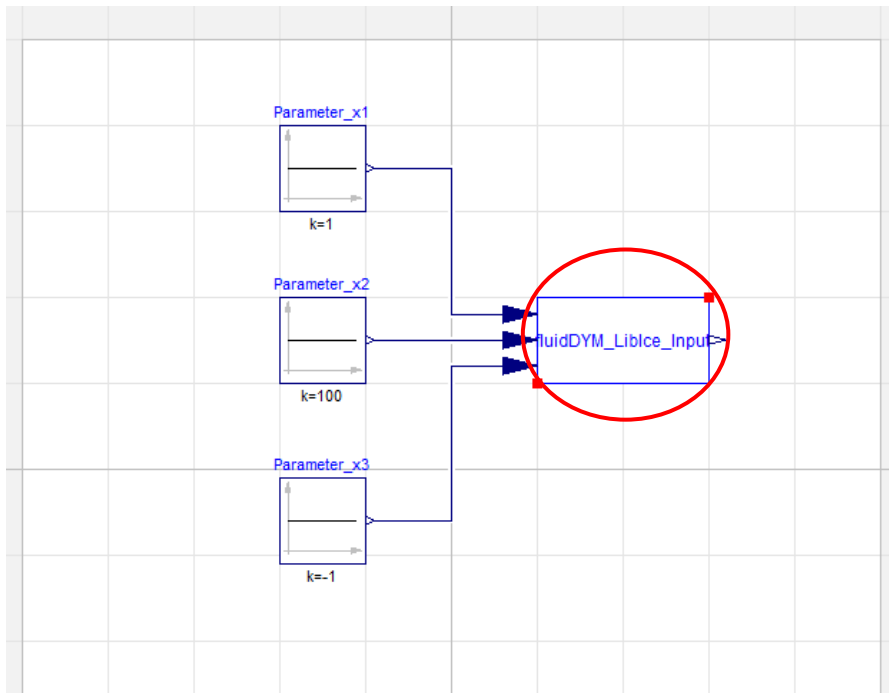


Figure 2.13: "Parameter_x1" block in Dymola

- Enter the value 1 on the line next to "k" in the dialog window which appears and then click the "OK" button (see Figure 2.14).

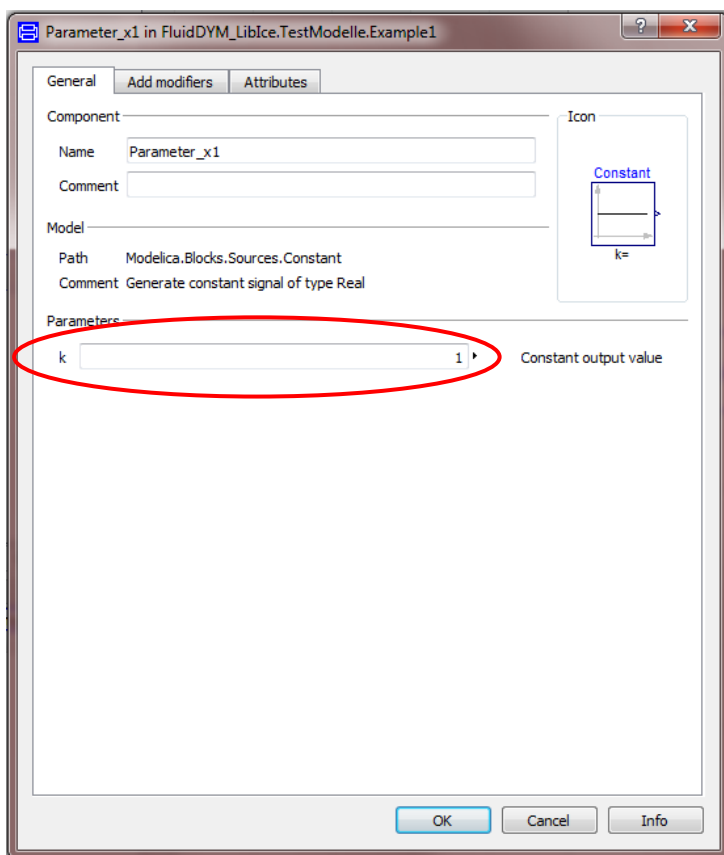


Figure 2.14: Entering the value for the pressure p

- Now, double click on the "Parameter_x2" block which represents the second input

parameter, here the temperature t in °C.

- Enter the value -10 on the line next to "k" in the dialog window which appears and then click the "OK" button.
- Now, double click on the "Parameter_x3" block which represents the third input parameter, here the vapor fraction x in kg/kg.

Since the wet steam region is calculated automatically by the subprograms, the following fixed details on the vapor fraction x are to be considered:

If the state point to be calculated is located in the single-phase region (liquid or superheated steam), e. g., pressure p and temperature t are given, the value -1 must be entered into the x cell as a pro-forma value.


If the state point to be calculated is located in the wet steam region, values between 0 and 1 have to be entered for x (the value 0 for boiling liquid, the value 1 for saturated steam).

Here, it is adequate to enter either the value given for t and $p = -1$, or the given value for p and $t = -1$, plus the value for x between 0 and 1.

However, if p and t and x are given when calculating wet steam, the program initially checks whether p and t meet the saturation-pressure curve. If this is not the case the enthalpy calculated later will result in -1000.

- Enter the value -1 on the line next to "k" in the dialog window which appears and then click the "OK" button.

All parameters have now been defined.

- Click on the  button in the lower right area of Dymola in order to switch into the "Simulation Mode".

In Figure 2.15 you can see how the Dymola "Simulation Mode" looks like.

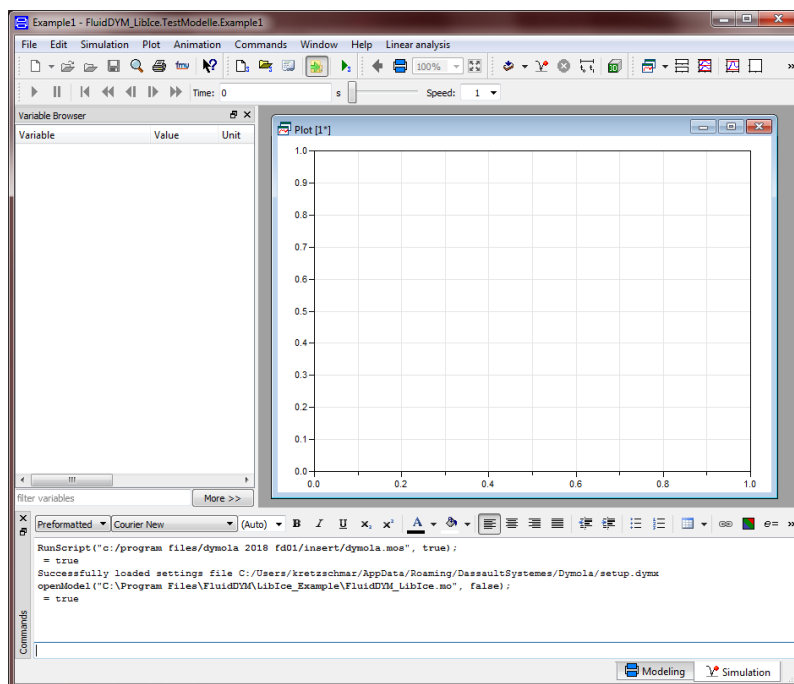


Figure 2.15: "Simulation Mode" window

IMPORTANT NOTICE:

Per default the 64-bit version of Dymola creates a 32-bit simulation process. If you want to create a 64-bit simulation process you must have installed the 64-bit version of FluidDYM LibICE and you now need to enter the following command into the command line of Dymola and confirm your entry by pressing the Enter key:

"Advanced.CompileWith64=2"

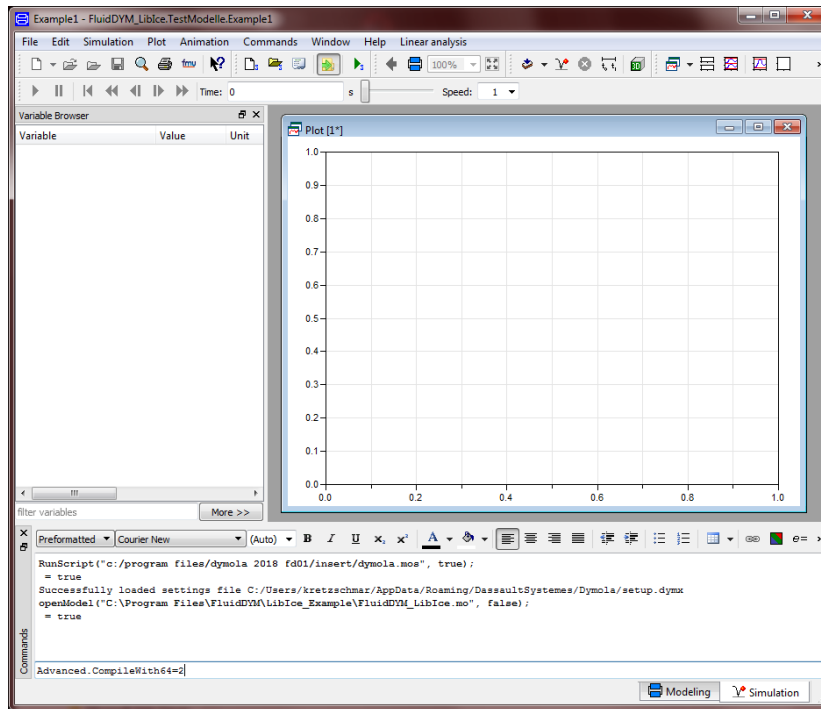



Figure 2.16: "Variable Browser" with new entries

Now, your 64-bit Dymola creates 64-bit simulation processes with FluidDYM.

Please note that if you restart Dymola and want to create 64-bit simulation processes again, you will always have to enter this command anew.

For further information concerning this matter, please see the Dymola user's guide.

- Click on the "Simulate" Button  in the Dymola menu bar to start the calculation. Now the model will be compiled and the simulation started.
- Afterwards you will see the following entries within the "Variable Browser" window in Dymola (see Figure 2.16):

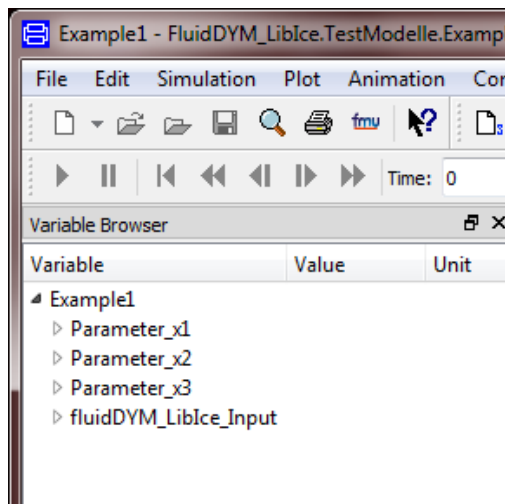



Figure 2.17: "Variable Browser" with new entries

- By clicking on the "New Plot Window" button , a new diagram window will be opened.
- Click on "fluidDYM_LibICE_Input" within the "Variable Browser"; then you will see the input and output parameters "scanRange", "FunctionNumber", "z", "x1", "x2" and "x3" (see Figure 2.18).

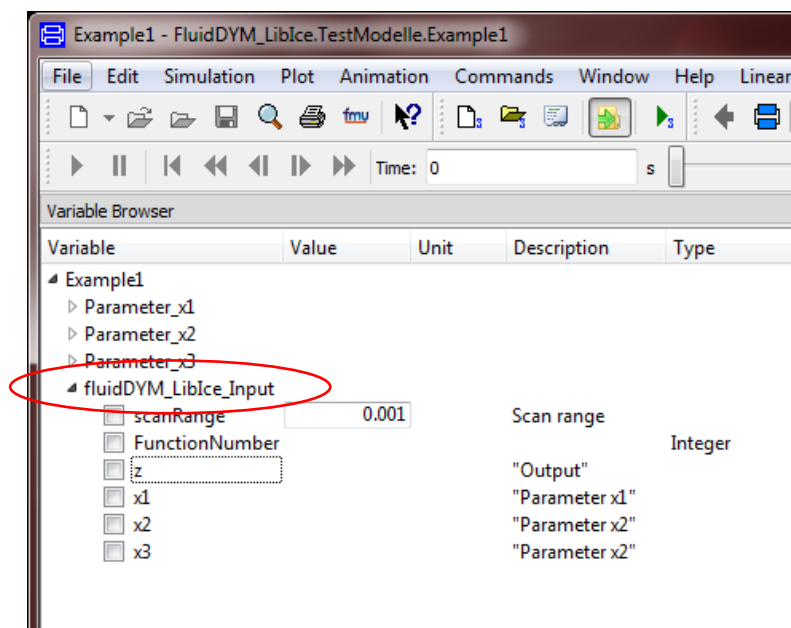


Figure 2.18: Parameters of *fluidDYM_LibICE_Input*

- After clicking on the output parameter "z", the calculated property will be represented graphically in the "PlotWindow".
- Move the mouse over the curve to see the result of the simulation at a specific point in time (see Figure 2.19).

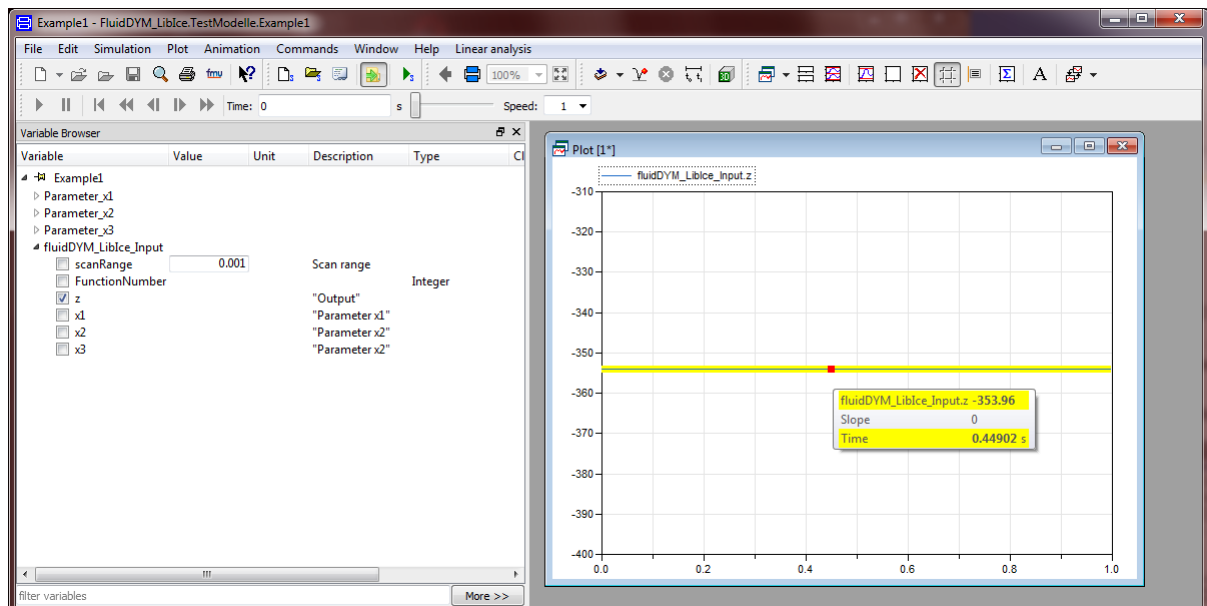



Figure 2.19: "DiagramWindow" showing the result


The result for h appears in the "DiagramWindow"

⇒ The result in our sample calculation here is: " $h = -353.96$ ". The corresponding unit is kJ/kg (see table of the property functions in Chapter 1).


- Now click on the Modeling button  in the lower right area of Dymola in order to switch into the "Modeling Mode". Here you can arbitrarily change the values for p , t , or x in the appropriate blocks.

Help Systems in Dymola®

Dymola® provides detailed help functions. You can choose to read the program documentation or the help page of a specific property function, as desired.

Within the "Modeling-Mode"  the help may be accessed via two different steps.

First we will show you how to access the program documentation of the property library.

- Make sure Dymola is set to the "Modeling-Mode".
- Now click the  button in the Dymola menu bar to choose the "Documentation Mode".
- Double-click on the "FluidDYM_LibIce" Block at the left and then click on "Users_Guide" (see Figure 2.20).

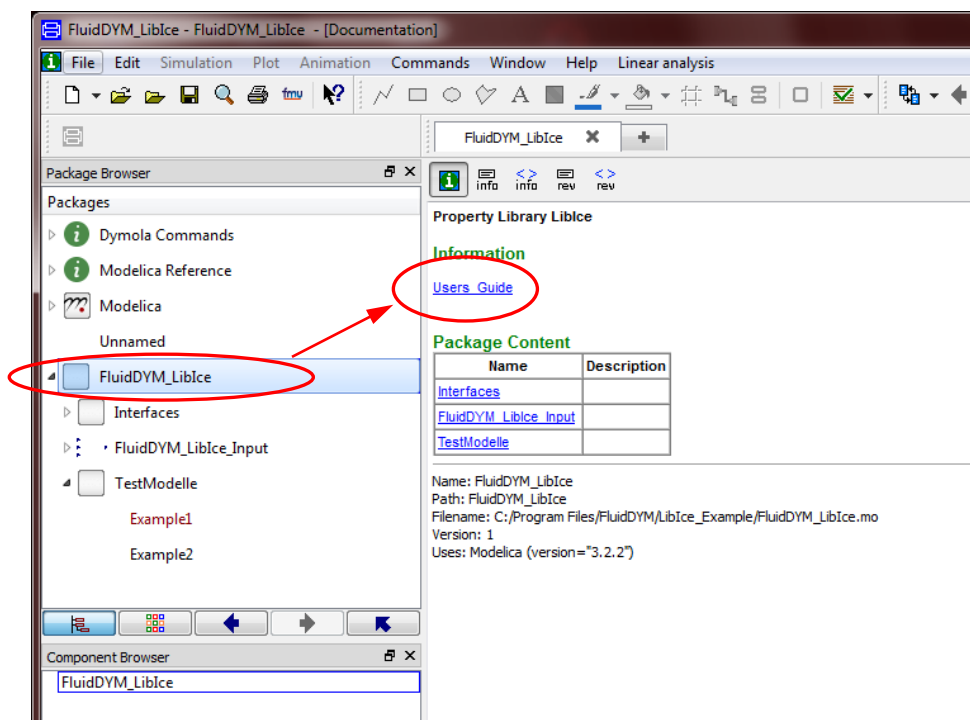



Figure 2.20: Selecting the "Users_Guide"

- The program documentation will be displayed within your default web browser.

Now, we will show you how to access the help page of a specific property function.

- Make sure Dymola is set to the "Modeling-Mode".
- Now click the  button in the Dymola menu bar to choose the "Documentation Mode".
- Double-click on the "FluidDYM_LibICE_Input" block on the left (see Figure 2.21).

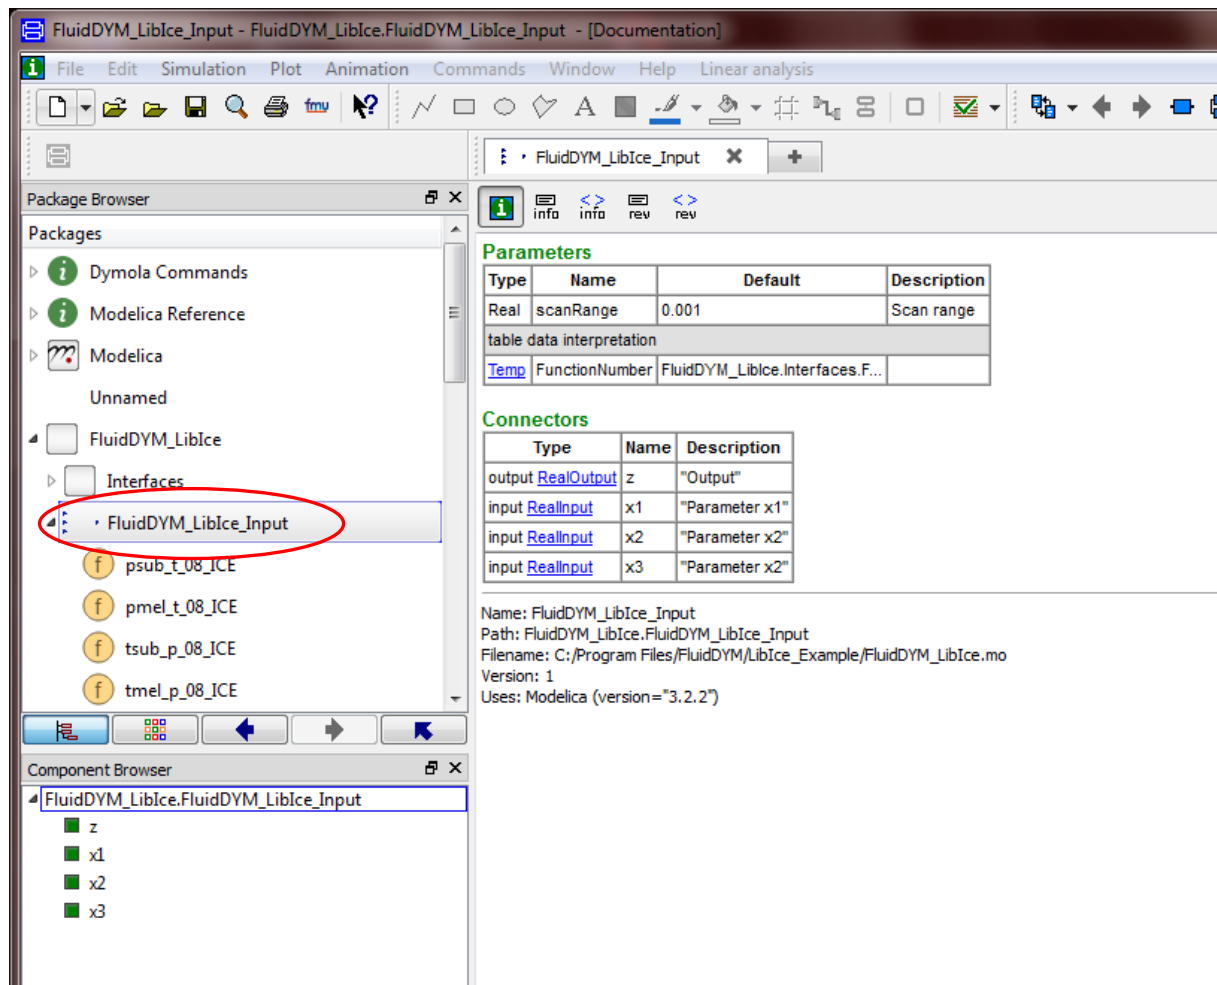


Figure 2.21: Selected "FluidDYM_LibICE_Input" Block

- Below "FluidDYM_LibICE_Input" you will see all functions of the LibICE property function (see Figure 2.21).
- Now select a function, e.g. "h_ptx_ICE", and then click on "Users_Guide" (see Figure 2.22).

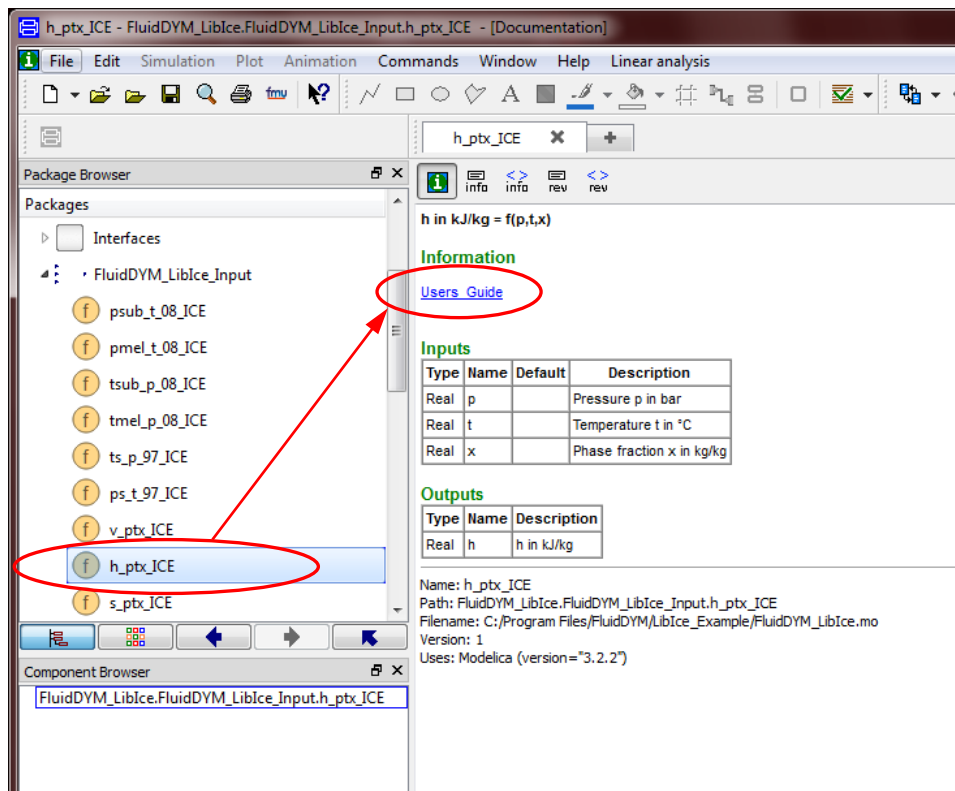


Figure 2.22: Marking the "h_ptx_ICE" function and selecting the "Users_Guide"

- You will now see the help page of the selected function, here "h_ptx_ICE", in your default web browser (see Figure 2.23).

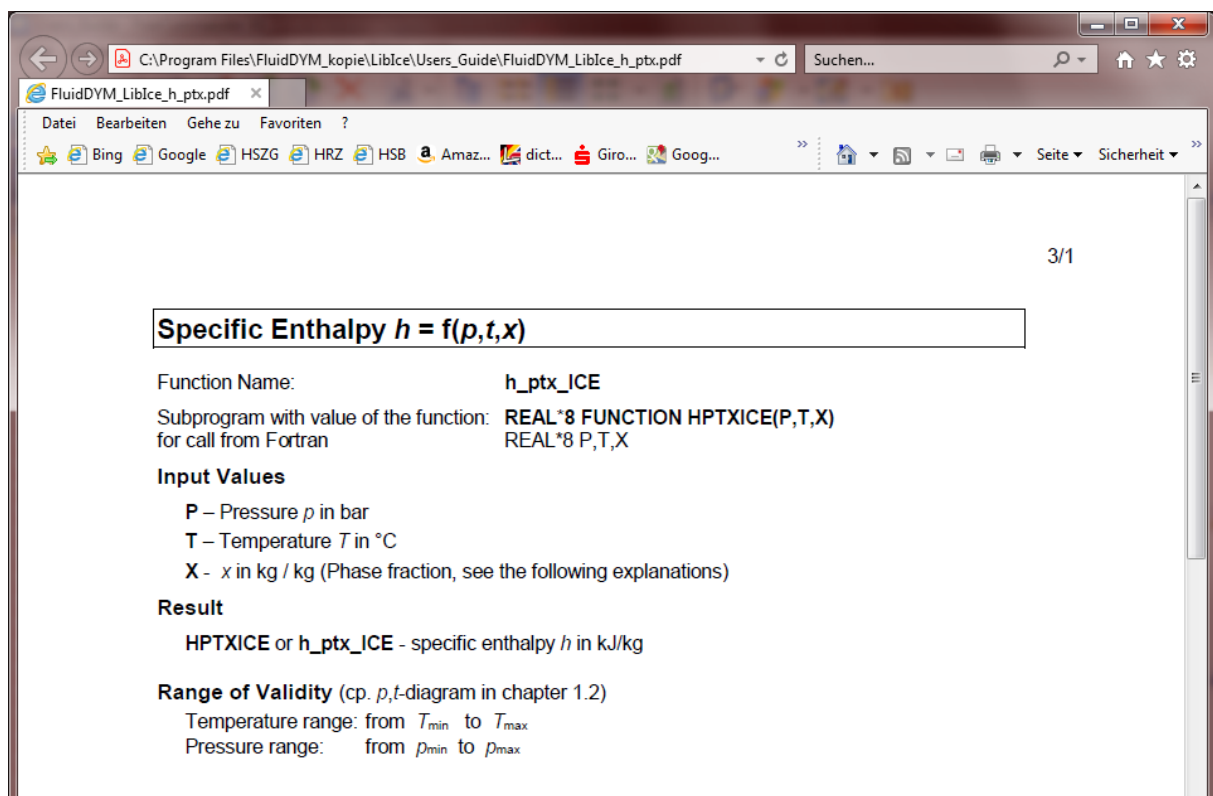


Figure 2.23: Help page of the function "h_ptx_ICE" in the web browser

2.4 Removing LibICE in Dymola

In order to remove the property library LibICE from your hard drive in Windows®, click "Start" in the lower task bar, then "Settings" and "Control Panel".

Afterwards double-click on "Add or Remove Programs".

In the list box of the "Add or Remove Programs" menu which appears, select "FluidDYM LibICE" by clicking on it and then clicking the "Change/Remove" button.

In the following dialogue box click "Automatic" and then "Next>".

Confirm the "Perform Uninstall" menu which appears by clicking the "Finish" button.

Finally, close the "Add or Remove Programs" and "Control Panel" windows.

"FluidDYM LibICE" has now been removed.

If LibICE is the only library installed, the directory "FluidDYM" will be removed as well.

3. Program Documentation

Thermal Diffusivity $a = f(p, t, x)$

Function Name: **a_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION APTXICE(P,T,X)**
for call from Fortran **REAL*8 P,T,X**

Input Values

P – Pressure p in bar

T – Temperature T in °C

X - x in kg / kg (Phase fraction, see the following explanations)

Result

APTXICE or **a_ptx_ICE** – Thermal diffusivity $a = \frac{\lambda \cdot v}{c_p}$ in m²/s

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}

Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p - h diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

The calculation for x values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
Pressure range from p_t to $p_s(T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

The calculation for x values between 10 and 11 is not possible.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{mel}(p_{max})$
Pressure range from p_t to p_{max}

3. Sublimation Region ($100 \leq x \leq 101$):

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{gas}}{(m_{ice} + m_{gas})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas.

The calculation for x values between 100 and 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve: Temperatur range from T_{min} to T_t
Pressure range from p_{min} to p_t

Results for wrong input values

Result **APT_XICE = -1000** or **a_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{min}$ or $p > p_{max}$
- at $T < T_{min}$ or $T > T_{max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $0 < x < 1$, i.e. calculation in the wet steam region not possible!
- at $p = -1000$ and $T < T_t$ or $T > T_{max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{max})$
- at $p < p_t$ or $p > p_s(T_{max})$
- at $T < T_t$ or $T > T_{max}$

Melting region ($10 \leq x \leq 11$):

- at $10 < x < 11$, i.e. calculation in the melting region not possible!
- at $p = -1000$ and $T > T_t$ or $T < T_{mel}(p_{max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{max}$
- at $p < p_t$ or $p > p_{max}$
- at $T > T_t$ or $T < T_{mel}(p_{max})$

Sublimation region ($100 \leq x \leq 101$):

- at $100 < x < 101$, i.e. calculation in the sublimation region not possible!
- at $p = -1000$ and $T < T_{min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{min}$ or $p > p_t$
- at $p < p_{min}$ or $p > p_t$
- at $T < T_{min}$ or $T > T_t$

References: [1], [2], [3], [6], [7], [8]

Isobaric cubic expansion coefficient $\alpha_v = f(p, t, x)$

Function Name: **alphav_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION ALPHAVPTXICE (P,T,X)**
for call from Fortran **REAL*8 P,T,X**

Input Values

P – Pressure p in bar

T – Temperature T in °C

X - x in kg / kg (Phase fraction, see the following explanations)

Result

ALPHAVPTXICE or **alphav_ptx_ICE** – Isobaric cubic expansion coefficient α_v in 1/K

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}

Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p - h diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

The calculation for x values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
Pressure range from p_t to $p_s (T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

The calculation for x values between 10 and 11 is not possible.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{\text{mel}} (p_{\max})$
Pressure range from p_t to p_{\max}

3. Sublimation Region ($100 \leq x \leq 101$) :

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{\text{gas}}}{(m_{\text{ice}} + m_{\text{gas}})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas.

The calculation for x values between 100 and 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve: Temperatur range from T_{\min} to T_t

Pressure range from p_{\min} to p_t

Results for wrong input values

Result **ALPHAVPTXICE = -1000** or **alphav_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{\min}$ or $p > p_{\max}$
- at $T < T_{\min}$ or $T > T_{\max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $0 < x < 1$, i.e. calculation in the wet steam region not possible!
- at $p = -1000$ and $T < T_t$ or $T > T_{\max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{\max})$
- at $p < p_t$ or $p > p_s(T_{\max})$
- at $T < T_t$ or $T > T_{\max}$

Melting region ($10 \leq x \leq 11$):

- at $10 < x < 11$, i.e. calculation in the melting region not possible!
- at $p = -1000$ and $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{\max}$
- at $p < p_t$ or $p > p_{\max}$
- at $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$

Sublimation region ($100 \leq x \leq 101$):

- at $100 < x < 101$, i.e. calculation in the sublimation region not possible!
- at $p = -1000$ and $T < T_{\min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{\min}$ or $p > p_t$
- at $p < p_{\min}$ or $p > p_t$
- at $T < T_{\min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Specific Isobaric Heat Capacity $c_p = f(p, t, x)$

Function Name: **cp_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION CPPTXICE(P,T,X)**
 for call from Fortran **REAL*8 P,T,X**

Input Values

- P** – Pressure p in bar
- T** – Temperature T in °C
- X** - x in kg / kg (Phase fraction, see the following explanations)

Result

CPPTXICE or **cp_ptx_ICE** - specific isobaric heat capacity c_p in kJ/(kg K)

Range of Validity (cp. p, t -diagram in chapter 1.2)

- Temperature range: from T_{\min} to T_{\max}
- Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p - h diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

The calculation for x values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
 Pressure range from p_t to $p_s (T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

The calculation for x values between 10 and 11 is not possible.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{\text{mel}} (p_{\max})$
 Pressure range from p_t to p_{\max}

3. Sublimation Region ($100 \leq x \leq 101$) :

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{\text{gas}}}{(m_{\text{ice}} + m_{\text{gas}})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas.

The calculation for x values between 100 and 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve: Temperatur range from T_{\min} to T_t

Pressure range from p_{\min} to p_t

Results for wrong input values

Result **CPPTXICE = -1000** or **cp_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{\min}$ or $p > p_{\max}$
- at $T < T_{\min}$ or $T > T_{\max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $0 < x < 1$, i.e. calculation in the wet steam region not possible!
- at $p = -1000$ and $T < T_t$ or $T > T_{\max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{\max})$
- at $p < p_t$ or $p > p_s(T_{\max})$
- at $T < T_t$ or $T > T_{\max}$

Melting region ($10 \leq x \leq 11$):

- at $10 < x < 11$, i.e. calculation in the melting region not possible!
- at $p = -1000$ and $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{\max}$
- at $p < p_t$ or $p > p_{\max}$
- at $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$

Sublimation region ($100 \leq x \leq 101$):

- at $100 < x < 101$, i.e. calculation in the sublimation region not possible!
- at $p = -1000$ and $T < T_{\min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{\min}$ or $p > p_t$
- at $p < p_{\min}$ or $p > p_t$
- at $T < T_{\min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Specific Isochoric Heat Capacity $c_v = f(p, t, x)$

Function Name: **cv_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION CVPTXICE(P,T,X)**
 for call from Fortran **REAL*8 P,T,X**

Input Values

- P** – Pressure p in bar
- T** – Temperature T in °C
- X** - x in kg / kg (Phase fraction, see the following explanations)

Result

CVPTXICE or **cv_ptx_ICE** - specific isochoric heat capacity c_v in kJ/(kg K)

Range of Validity (cp. p, t -diagram in chapter 1.2)

- Temperature range: from T_{\min} to T_{\max}
- Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p - t diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

The calculation for x values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
 Pressure range from p_t to $p_s (T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

The calculation for x values between 10 and 11 is not possible.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{\text{mel}} (p_{\max})$
 Pressure range from p_t to p_{\max}

3. Sublimation Region ($100 \leq x \leq 101$) :

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{\text{gas}}}{(m_{\text{ice}} + m_{\text{gas}})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas.

The calculation for x values between 100 and 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve: Temperatur range from T_{\min} to T_t

Pressure range from p_{\min} to p_t

Results for wrong input values

Result **CVPTXICE = -1000** or **cv_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{\min}$ or $p > p_{\max}$
- at $T < T_{\min}$ or $T > T_{\max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $0 < x < 1$, i.e. calculation in the wet steam region not possible!
- at $p = -1000$ and $T < T_t$ or $T > T_{\max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{\max})$
- at $p < p_t$ or $p > p_s(T_{\max})$
- at $T < T_t$ or $T > T_{\max}$

Melting region ($10 \leq x \leq 11$):

- at $10 < x < 11$, i.e. calculation in the melting region not possible!
- at $p = -1000$ and $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{\max}$
- at $p < p_t$ or $p > p_{\max}$
- at $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$

Sublimation region ($100 \leq x \leq 101$):

- at $100 < x < 101$, i.e. calculation in the sublimation region not possible!
- at $p = -1000$ and $T < T_{\min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{\min}$ or $p > p_t$
- at $p < p_{\min}$ or $p > p_t$
- at $T < T_{\min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Dynamic Viscosity $\eta = f(p, t, x)$

Function Name: **eta_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION ETAPTXICE(P,T,X)**
 for call from Fortran **REAL*8 P,T,X**

Input Values

- P** – Pressure p in bar
- T** – Temperature T in °C
- X** - x in kg / kg (Phase fraction, see the following explanations)

Result

ETAPTXICE or **eta_ptx_ICE** – dynamic viscosity η in Pa s

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}
 Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value. This function can only be used for liquid and steam region.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p, h -diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

The calculation for x values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
 Pressure range from p_t to $p_s(T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

The calculation for x values unequal to 11 is not possible.

For solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Solidification curve: Temperature range from T_t to $T_{\text{mel}}(p_{\max})$
 Pressure range from p_t to p_{\max}

3. Sublimation Region ($100 \leq x \leq 101$) :

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{\text{gas}}}{(m_{\text{ice}} + m_{\text{gas}})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas.

The calculation for x values unequal to 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Desublimation curve: Temperatur range from T_{\min} to T_t
 Pressure range from p_{\min} to p_t

Results for wrong input values

Result **ETAPTXICE = -1000** or **eta_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{\min}$ or $p > p_{\max}$
- at $T < T_{\min}$ or $T > T_{\max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $0 < x < 1$, i.e. calculation in the wet steam region not possible!
- at $p = -1000$ and $T < T_t$ or $T > T_{\max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{\max})$
- at $p < p_t$ or $p > p_s(T_{\max})$
- at $T < T_t$ or $T > T_{\max}$

Melting region ($10 \leq x \leq 11$):

- at $x < 11$, i.e. calculation in the melting region not possible!
- at $p = -1000$ and $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{\max}$
- at $p < p_t$ or $p > p_{\max}$
- at $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$

Sublimation region ($100 \leq x \leq 101$):

- at $x < 101$, i.e. calculation in the sublimation region not possible!
- at $p = -1000$ and $T < T_{\min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{\min}$ or $p > p_t$
- at $p < p_{\min}$ or $p > p_t$
- at $T < T_{\min}$ or $T > T_t$

References: [1], [2], [4], [6], [7], [8]

Specific Enthalpy $h = f(p, t, x)$

Function Name: **h_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION HPTXICE(P,T,X)**
for call from Fortran **REAL*8 P,T,X**

Input Values

P – Pressure p in bar

T – Temperature T in °C

X - x in kg / kg (Phase fraction, see the following explanations)

Result

HPTXICE or **h_ptx_ICE** - specific enthalpy h in kJ/kg

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}

Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p, h -diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

If the state point to be calculated is located in the wet steam region, a value between 0 and 1 must be entered for x . If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
Pressure range from p_t to $p_s(T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

If the state point to be calculated is located in the melting region, a value between 10 and 11 must be entered for x . If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{mel}(p_{max})$
Pressure range from p_t to p_{max}

3. Sublimation Region ($100 \leq x \leq 101$):

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{gas}}{(m_{ice} + m_{gas})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas. If the state point to be calculated is located in the melting region, a value between 100 and 101 must be entered for x .

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Melting and

Solidification curve: Temperatur range from T_{min} to T_t
Pressure range from p_{min} to p_t

Results for wrong input values

Result **HPTXICE = -1000** or **h_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{min}$ or $p > p_{max}$
- at $T < T_{min}$ or $T > T_{max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $p = -1000$ and $T < T_t$ or $T > T_{max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{max})$
- at $p < p_t$ or $p > p_s(T_{max})$
- at $T < T_t$ or $T > T_{max}$

Melting region ($10 \leq x \leq 11$):

- at $p = -1000$ and $T > T_t$ or $T < T_{mel}(p_{max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{max}$
- at $p < p_t$ or $p > p_{max}$
- at $T > T_t$ or $T < T_{mel}(p_{max})$

Sublimation region ($100 \leq x \leq 101$):

- at $p = -1000$ and $T < T_{min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{min}$ or $p > p_t$
- at $p < p_{min}$ or $p > p_t$
- at $T < T_{min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Isentropic Exponent $\kappa = f(p, t, x)$

Function Name: **kappa_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION KAPPAPTXICE (P,T,X)**
 for call from Fortran **REAL*8 P,T,X**

Input Values

P – Pressure p in bar

T – Temperature T in °C

X - x in kg / kg (Phase fraction, see the following explanations)

Result

KAPPAPTXICE or **kappa_ptx_ICE** – Isentropic exponent $\kappa = \frac{w^2}{p^* v}$

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}

Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p - h diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

The calculation for x values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
 Pressure range from p_t to $p_s (T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

The calculation for x values between 10 and 11 is not possible.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{mel}(p_{max})$
Pressure range from p_t to p_{max}

3. Sublimation Region ($100 \leq x \leq 101$):

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{gas}}{(m_{ice} + m_{gas})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas.

The calculation for x values between 100 and 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve: Temperatur range from T_{min} to T_t
Pressure range from p_{min} to p_t

Results for wrong input values

Result **KAPPAPTIXICE = -1000** or **kappa_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{min}$ or $p > p_{max}$
- at $T < T_{min}$ or $T > T_{max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $0 < x < 1$, i.e. calculation in the wet steam region not possible!
- at $p = -1000$ and $T < T_t$ or $T > T_{max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{max})$
- at $p < p_t$ or $p > p_s(T_{max})$
- at $T < T_t$ or $T > T_{max}$

Melting region ($10 \leq x \leq 11$):

- at $10 < x < 11$, i.e. calculation in the melting region not possible!
- at $p = -1000$ and $T > T_t$ or $T < T_{mel}(p_{max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{max}$
- at $p < p_t$ or $p > p_{max}$
- at $T > T_t$ or $T < T_{mel}(p_{max})$

Sublimation region ($100 \leq x \leq 101$):

- at $100 < x < 101$, i.e. calculation in the sublimation region not possible!
- at $p = -1000$ and $T < T_{min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{min}$ or $p > p_t$
- at $p < p_{min}$ or $p > p_t$
- at $T < T_{min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Isothermal compressibility $\kappa_t = f(p, t, x)$

Function Name: **kappaT_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION KAPPATPTXICE (P,T,X)**
 for call from Fortran **REAL*8 P,T,X**

Input Values

P – Pressure p in bar

T – Temperature T in °C

X - x in kg / kg (Phase fraction, see the following explanations)

Result

KAPPATPTXICE or **kappaT_ptx_ICE** – Isothermal compressibility κ_T in 1/kPa

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}

Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p - h diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

The calculation for x values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}

Pressure range from p_t to $p_s(T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

The calculation for x values between 10 and 11 is not possible.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{\text{mel}}(p_{\max})$

Pressure range from p_t to p_{\max}

3. Sublimation Region ($100 \leq x \leq 101$) :

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{\text{gas}}}{(m_{\text{ice}} + m_{\text{gas}})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas.

The calculation for x values between 100 and 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve: Temperatur range from T_{\min} to T_t

Pressure range from p_{\min} to p_t

Results for wrong input values

Result **KAPPATPTXICE = -1000** or **kappaT_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{\min}$ or $p > p_{\max}$
- at $T < T_{\min}$ or $T > T_{\max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $0 < x < 1$, i.e. calculation in the wet steam region not possible!
- at $p = -1000$ and $T < T_t$ or $T > T_{\max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{\max})$
- at $p < p_t$ or $p > p_s(T_{\max})$
- at $T < T_t$ or $T > T_{\max}$

Melting region ($10 \leq x \leq 11$):

- at $10 < x < 11$, i.e. calculation in the melting region not possible!
- at $p = -1000$ and $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{\max}$
- at $p < p_t$ or $p > p_{\max}$
- at $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$

Sublimation region ($100 \leq x \leq 101$):

- at $100 < x < 101$, i.e. calculation in the sublimation region not possible!
- at $p = -1000$ and $T < T_{\min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{\min}$ or $p > p_t$
- at $p < p_{\min}$ or $p > p_t$
- at $T < T_{\min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Thermal Conductivity $\lambda = f(p, t, x)$

Function Name: **lambda_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION LAMBDAPTXICE (P,T,X)**
 for call from Fortran **REAL*8 P,T,X**

Input Values

P – Pressure p in bar

T – Temperature T in °C

X - x in kg / kg (Phase fraction, see the following explanations)

Result

LAMBDAPTXICE or **lambda_ptx_ICE** – Thermal conductivity λ in W/(m K)

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}

Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. p - h diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

The calculation for x values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
 Pressure range from p_t to $p_s (T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

The calculation for x values between 10 and 11 is not possible.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{mel}(p_{max})$
Pressure range from p_t to p_{max}

3. Sublimation Region ($100 \leq x \leq 101$):

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{gas}}{(m_{ice} + m_{gas})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas.

The calculation for x values between 100 and 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve: Temperatur range from T_{min} to T_t
Pressure range from p_{min} to p_t

Results for wrong input values

Result **LAMBDAPTIXICE = -1000** or **lambda_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{min}$ or $p > p_{max}$
- at $T < T_{min}$ or $T > T_{max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $0 < x < 1$, i.e. calculation in the wet steam region not possible!
- at $p = -1000$ and $T < T_t$ or $T > T_{max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{max})$
- at $p < p_t$ or $p > p_s(T_{max})$
- at $T < T_t$ or $T > T_{max}$

Melting region ($10 \leq x \leq 11$):

- at $10 < x < 11$, i.e. calculation in the melting region not possible!
- at $p = -1000$ and $T > T_t$ or $T < T_{mel}(p_{max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{max}$
- at $p < p_t$ or $p > p_{max}$
- at $T > T_t$ or $T < T_{mel}(p_{max})$

Sublimation region ($100 \leq x \leq 101$):

- at $100 < x < 101$, i.e. calculation in the sublimation region not possible!
- at $p = -1000$ and $T < T_{min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{min}$ or $p > p_t$
- at $p < p_{min}$ or $p > p_t$
- at $T < T_{min}$ or $T > T_t$

References: [1], [2], [3], [6], [7], [8]

Melting Pressure $p_{\text{mel}} = f(t)$

Function Name: **pmel_t_08_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION PMEL_T_08_ICE (T)**
 for call from Fortran **REAL*8 T**

Input Values

T - Temperature T in °C

Result

PMEL_T_08_ICE or **pmel_t_08_ICE** – Melting pressure p_{mel} in bar

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range from T_t to $T_{\text{mel}} (p_{\text{max}})$

Results for wrong input values

Result **PMEL_T_08_ICE = -1000** or **pmel_t_08_ICE = -1000** for input values:

- at $T > T_t$ or $T < T_{\text{mel}} (p_{\text{max}})$

References: [8]

Vapor Pressure $p_s = f(t)$

Function Name: **ps_t_97_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION PS_T_97_ICE (T)**
 for call from Fortran **REAL*8 T**

Input Values

T - Temperature T in °C

Result

PS_T_97_ICE or **ps_t_97_ICE** – vapor pressure p_s in bar

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_t to T_c

Results for wrong input values

Result **PS_T_97_ICE = -1000** or **ps_t_97_ICE = -1000** for input values:

- at $T < T_t$ or $T > T_c$

References: [1], [2]

Sublimation Pressure $p_{\text{sub}} = f(t)$

Function Name: **psub_t_08_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION PSUB_T_08_ICE (T)**
 for call from Fortran **REAL*8 T**

Input Values

T - Temperature T in °C

Result

PSUB_T_08_ICE or **psub_t_08_ICE** – Sublimation pressure p_{sub} in bar

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{min} to T_{t}

Results for wrong input values

Result **PSUB_T_08_ICE = -1000** or **psub_t_08_ICE = -1000** for input values:

- at $T < T_{\text{min}}$ or $T > T_{\text{t}}$

References: [8]

Density $\rho = f(p, t, x)$

Function Name: **rho_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION RHOPTXICE (P,T,X)**
 for call from Fortran **REAL*8 P,T,X**

Input Values

P – Pressure p in bar

T – Temperature T in °C

X - x in kg / kg (Phase fraction, see the following explanations)

Result

RHOPTXICE or **rho_ptx_ICE** - Density ρ in kg/m³

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}

Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p, h -diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

If the state point to be calculated is located in the wet steam region, a value between 0 and 1 must be entered for x . If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
 Pressure range from p_t to $p_s (T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

If the state point to be calculated is located in the melting region, a value between 10 and 11 must be entered for x . If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{mel}(p_{max})$
 Pressure range from p_t to p_{max}

3. Sublimation Region ($100 \leq x \leq 101$):

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{gas}}{(m_{ice} + m_{gas})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas. If the state point to be calculated is located in the melting region, a value between 100 and 101 must be entered for x .

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Melting and

Solidification curve: Temperatur range from T_{min} to T_t
 Pressure range from p_{min} to p_t

Results for wrong input values

Result **RHOPTXICE = -1000** or **rho_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{min}$ or $p > p_{max}$
- at $T < T_{min}$ or $T > T_{max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $p = -1000$ and $T < T_t$ or $T > T_{max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{max})$
- at $p < p_t$ or $p > p_s(T_{max})$
- at $T < T_t$ or $T > T_{max}$

Melting region ($10 \leq x \leq 11$):

- at $p = -1000$ and $T > T_t$ or $T < T_{mel}(p_{max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{max}$
- at $p < p_t$ or $p > p_{max}$
- at $T > T_t$ or $T < T_{mel}(p_{max})$

Sublimation region ($100 \leq x \leq 101$):

- at $p = -1000$ and $T < T_{min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{min}$ or $p > p_t$
- at $p < p_{min}$ or $p > p_t$
- at $T < T_{min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Specific Entropy $s = f(p, t, x)$

Function Name: **s_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION SPTXICE (P,T,X)**
 for call from Fortran **REAL*8 P,T,X**

Input Values

P – Pressure p in bar

T – Temperature T in °C

X - x in kg / kg (Phase fraction, see the following explanations)

Result

SPTXICE or **s_ptx_ICE** - Specific entropy s in kJ/(kg K)

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}

Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p, h -diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

If the state point to be calculated is located in the wet steam region, a value between 0 and 1 must be entered for x . If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
 Pressure range from p_t to $p_s(T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

If the state point to be calculated is located in the melting region, a value between 10 and 11 must be entered for x . If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{mel}(p_{max})$
 Pressure range from p_t to p_{max}

3. Sublimation Region ($100 \leq x \leq 101$):

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{gas}}{(m_{ice} + m_{gas})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas. If the state point to be calculated is located in the melting region, a value between 100 and 101 must be entered for x .

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Melting and

Solidification curve: Temperatur range from T_{min} to T_t
 Pressure range from p_{min} to p_t

Results for wrong input values

Result **SPTXICE = -1000** or **s_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{min}$ or $p > p_{max}$
- at $T < T_{min}$ or $T > T_{max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $p = -1000$ and $T < T_t$ or $T > T_{max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{max})$
- at $p < p_t$ or $p > p_s(T_{max})$
- at $T < T_t$ or $T > T_{max}$

Melting region ($10 \leq x \leq 11$):

- at $p = -1000$ and $T > T_t$ or $T < T_{mel}(p_{max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{max}$
- at $p < p_t$ or $p > p_{max}$
- at $T > T_t$ or $T < T_{mel}(p_{max})$

Sublimation region ($100 \leq x \leq 101$):

- at $p = -1000$ and $T < T_{min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{min}$ or $p > p_t$
- at $p < p_{min}$ or $p > p_t$
- at $T < T_{min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Backward Function: Temperature $t = f(p, h)$

Function Name: **t_ph_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION TPHICE (P,H)**
 for call from Fortran **REAL*8 P,H**

Input Values

P – Pressure p in bar

H - Specific enthalpy h in kJ/kg

Result

TPHICE or **t_ph_ICE** – Temperature t in °C

Range of Validity (cp. p, t -diagram in chapter 1.2)

Pressure range: from p_{\min} to p_{\max}

Enthalpy range: from $h < h_{\max} = h(p_{\min}, T_{\max})$ to $h > h_{\min} = h(p_{\min}, T_{\min})$

Temperature range: from T_{\min} to T_{\max} (resulting from internal calculation of the subprograms)

Details on calculating the two phase regions

Using the given values for p and h , the program determines whether the point of state to be calculated is located in the single phase region (solid, liquid or steam) or in the two phase region. The two phase regions wet steam region, melting region and sublimation region (cp. lg p, h -diagram chapter 1.2) are calculated automatically by the subprograms. After that, the calculation is realized for the certain region.

Results for wrong input values

Result **TPHICE = -1000** or **t_ph_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam:

- at $p < p_{\min}$ or $p > p_{\max}$
- at calculation result $T < T_{\min}$ or $T > T_{\max}$ or $T > T_{\text{mel}}(p_{\max})$ when calculating melting region

Two phase regions:

Wet steam region:

- at $p < p_t$ or $p > p_s(T_{\max})$
- at calculation result $T < T_t$ or $T > T_{\max}$

Melting region:

- at $p < p_t$ or $p > p_{\max}$
- at calculation result $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$

Sublimation region:

- at $p < p_{\min}$ or $p > p_t$
- at calculation result $T < T_{\min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Backward Function: Temperature $t = f(p,s)$

Function Name: **t_ps_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION TPSICE (P,S)**
for call from Fortran **REAL*8 P,S**

Input Values

P – Pressure p in bar

S - Specific entropy s in kJ/(kg K)

Result

TPSICE or **t_ps_ICE** – Temperature t in °C

Range of Validity (cp. p, t -diagram in chapter 1.2)

Pressure range: from p_{\min} to p_{\max}

Entropy range: from $s < s_{\max} = s(p_{\min}, T_{\max})$ to $s > s_{\min} = s(p_{\min}, T_{\min})$

Temperature range: from T_{\min} to T_{\max} (resulting from internal calculation of the subprograms)

Details on calculating the two phase regions

Using the given values for p and s , the program determines whether the point of state to be calculated is located in the single phase region (solid, liquid or steam) or in the two phase region. The two phase regions wet steam region, melting region and sublimation region (cp. lg p, h -diagram chapter 1.2) are calculated automatically by the subprograms. After that, the calculation is realized for the certain region.

Results for wrong input values

Result **TPSICE** = **-1000** or **t_ps_ICE** = **-1000** for input values:

Single phase region:

Solid, liquid, overheated steam:

- at $p < p_{\min}$ or $p > p_{\max}$
- at calculation result $T < T_{\min}$ or $T > T_{\max}$ or $T > T_{\text{mel}}(p_{\max})$ when calculating melting region

Two phase regions:

Wet steam region:

- at $p < p_t$ or $p > p_s(T_{\max})$
- at calculation result $T < T_t$ or $T > T_{\max}$

Melting region:

- at $p < p_t$ or $p > p_{\max}$
- at calculation result $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$

Sublimation region:

- at $p < p_{\min}$ or $p > p_t$
- at calculation result $T < T_{\text{mel}}(p_{\max})$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Melting Temperature $t_{\text{mel}} = f(p)$

Function Name: **tmel_p_08_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION TMEL_P_08_ICE (P)**
 for call from Fortran **REAL*8 P**

Input Values

P – Pressure p in bar

Result

TMEL_P_08_ICE or **tmel_p_08_ICE** – Melting temperature t_{mel} in °C

Range of Validity (cp. p, t -diagram in chapter 1.2)

Pressure range: from p_t to p_{max}

Results for wrong input values

Result **TMELICE = -1000** or **tmel_p_ICE = -1000** for input values:

- at $p < p_t$ or $p > p_{\text{max}}$

References: [8]

Saturation Temperature $t_s = f(p)$

Function Name: **ts_p_97_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION TS_P_97_ICE (P)**
 for call from Fortran **REAL*8 P**

Input Values

P – Pressure p in bar

Result

TS_P_97_ICE or **ts_p_97_ICE** – Saturation temperature t_s in °C

Range of Validity (cp. p, t -diagram in chapter 1.2)

Pressure range: from p_t to p_c

Results for wrong input values

Result **TS_P_97_ICE = -1000** or **ts_p_97_ICE = -1000** for input values:

- at $p < p_t$ or $p > p_c$

References: [1], [2]

Sublimation Temperature $t_{\text{sub}} = f(p)$

Function Name: **tsub_p_08_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION TSUB_P_08_ICE (P)**
 for call from Fortran **REAL*8 P**

Input Values

P – Pressure p in bar

Result

TSUB_P_08_ICE or **tsub_p_08_ICE** – Sublimation temperature t_{sub} in °C

Range of Validity (cp. p, t -diagram in chapter 1.2)

Pressure range: from p_{min} to p_t

Results for wrong input values

Result **TSUB_P_08_ICE = -1000** or **tsub_p_08_ICE = -1000** for input values:

- at $p < p_{\text{min}}$ or $p > p_t$

References: [8]

Specific inner energy $u = f(p, t, x)$

Function Name: **u_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION UPTXICE (P,T,X)**
 for call from Fortran **REAL*8 P,T,X**

Input Values

P – Pressure p in bar

T – Temperature T in °C

X - x in kg / kg (Phase fraction, see the following explanations)

Result

UPTXICE or **u_ptx_ICE** – Specific inner energy u in kJ/kg

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}

Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p, h -diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

If the state point to be calculated is located in the wet steam region, a value between 0 and 1 must be entered for x . If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
 Pressure range from p_t to $p_s(T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

If the state point to be calculated is located in the melting region, a value between 10 and 11 must be entered for x . If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{mel}(p_{max})$
 Pressure range from p_t to p_{max}

3. Sublimation Region ($100 \leq x \leq 101$):

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{gas}}{(m_{ice} + m_{gas})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas. If the state point to be calculated is located in the melting region, a value between 100 and 101 must be entered for x .

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Melting and

Solidification curve: Temperatur range from T_{min} to T_t
 Pressure range from p_{min} to p_t

Results for wrong input values

Result **UPTXICE = -1000** or **u_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{min}$ or $p > p_{max}$
- at $T < T_{min}$ or $T > T_{max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $p = -1000$ and $T < T_t$ or $T > T_{max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{max})$
- at $p < p_t$ or $p > p_s(T_{max})$
- at $T < T_t$ or $T > T_{max}$

Melting region ($10 \leq x \leq 11$):

- at $p = -1000$ and $T > T_t$ or $T < T_{mel}(p_{max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{max}$
- at $p < p_t$ or $p > p_{max}$
- at $T > T_t$ or $T < T_{mel}(p_{max})$

Sublimation region ($100 \leq x \leq 101$):

- at $p = -1000$ and $T < T_{min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{min}$ or $p > p_t$
- at $p < p_{min}$ or $p > p_t$
- at $T < T_{min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Specific Volume $v = f(p, t, x)$

Function Name: **v_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION VPTXICE (P,T,X)**
 for call from Fortran **REAL*8 P,T,X**

Input Values

P – Pressure p in bar

T – Temperature T in °C

X - x in kg / kg (Phase fraction, see the following explanations)

Result

VPTXICE or **v_ptx_ICE** – Specific volume v in m³/kg

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}

Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p, h -diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

If the state point to be calculated is located in the wet steam region, a value between 0 and 1 must be entered for x . If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
 Pressure range from p_t to $p_s(T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

If the state point to be calculated is located in the melting region, a value between 10 and 11 must be entered for x . If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{mel}(p_{max})$
 Pressure range from p_t to p_{max}

3. Sublimation Region ($100 \leq x \leq 101$):

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{gas}}{(m_{ice} + m_{gas})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas. If the state point to be calculated is located in the melting region, a value between 100 and 101 must be entered for x .

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t and x are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Melting and

Solidification curve: Temperatur range from T_{min} to T_t
 Pressure range from p_{min} to p_t

Results for wrong input values

Result **VPTXICE = -1000** or **v_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{min}$ or $p > p_{max}$
- at $T < T_{min}$ or $T > T_{max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $p = -1000$ and $T < T_t$ or $T > T_{max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{max})$
- at $p < p_t$ or $p > p_s(T_{max})$
- at $T < T_t$ or $T > T_{max}$

Melting region ($10 \leq x \leq 11$):

- at $p = -1000$ and $T > T_t$ or $T < T_{mel}(p_{max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{max}$
- at $p < p_t$ or $p > p_{max}$
- at $T > T_t$ or $T < T_{mel}(p_{max})$

Sublimation region ($100 \leq x \leq 101$):

- at $p = -1000$ and $T < T_{min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{min}$ or $p > p_t$
- at $p < p_{min}$ or $p > p_t$
- at $T < T_{min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Isentropic Speed of Sound $w = f(p, t, x)$

Function Name: **w_ptx_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION WPTXICE (P,T,X)**
 for call from Fortran **REAL*8 P,T,X**

Input Values

P – Pressure p in bar

T – Temperature T in °C

X - x in kg / kg (Phase fraction, see the following explanations)

Result

WPTXICE or **w_ptx_ICE** – Speed of sound w in m/s

Range of Validity (cp. p, t -diagram in chapter 1.2)

Temperature range: from T_{\min} to T_{\max}

Pressure range: from p_{\min} to p_{\max}

Details on the phase fraction x

If the state point to be calculated is located in the single phase region (solid, liquid or superheated steam), $x = -1000$ must be entered as a pro-forma value.

The two phase regions wet steam region, melting region and sublimation region are calculated automatically by the subprograms. For this purpose the following facts have to be considered (cp. lg p - h diagram chapter 1.2):

1. Wet Vapor Region ($0 \leq x \leq 1$) :

The phase fraction x equates to the vapor fraction x in the wet steam region $x = \frac{m''}{(m' + m'')}$. Its unit is (kg saturated steam)/(kg wet steam).

The calculation for x values between 0 and 1 is not possible.

If boiling liquid (boiling curve) is to be calculated, the value 0 has to be entered for x . In case of dry saturated steam (dew curve) $x = 1$ has to be entered.

Concerning pressure and temperature either the given value for t and $p = -1000$ or the given value for p and $t = -1000$ and in both cases the value 0 or 1 for x must be entered when calculating boiling liquid or dry saturated steam. If p and t and x are entered, the program will consider p and t to represent the vapor pressure curve.

Boiling and dew curve: Temperature range from T_t to T_{\max}
 Pressure range from p_t to $p_s (T_{\max})$

2. Melting Region ($10 \leq x \leq 11$) :

The phase fraction x equates to the liquid fraction x in the melting region $x = 10 + \frac{m_{\text{liq}}}{(m_{\text{ice}} + m_{\text{liq}})}$. Its unit

is (kg solidified liquid)/(kg melt), whereas melt is a mixture of melting ice and solidified liquid.

The calculation for x values between 10 and 11 is not possible.

If melting solid (melting curve) is to be calculated, the value 10 has to be entered for x . In case of solidifying liquid (solidification curve) $x = 11$ has to be entered.

When calculating a melting solid or solidifying liquid it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 10$ or $x = 11$). If p and t and x are entered as given values, the program tests whether p and t fulfil the melting pressure curve.

Melting and

Solidification curve: Temperature range from T_t to $T_{\text{mel}} (p_{\max})$
 Pressure range from p_t to p_{\max}

3. Sublimation Region ($100 \leq x \leq 101$) :

The phase fraction x equates to the gas fraction x in the sublimation region $x = 100 + \frac{m_{\text{gas}}}{(m_{\text{ice}} + m_{\text{gas}})}$. Its

unit is (kg desublimated gas)/(kg sublimation powder), whereas sublimation powder is a mixture of sublimating ice and desublimated gas.

The calculation for x values between 100 and 101 is not possible.

If sublimating solid is to be calculated, the value 100 has to be entered for x . In case of desublimating steam $x = 101$ has to be entered.

When calculating a sublimating solid or desublimating steam it is adequate, Concerning pressure and temperature, to put in either the value given for t and $p = -1000$ or the value given for p and $t = -1000$ and the value for x ($x = 100$ or $x = 101$). If p and t are entered as given values the program tests whether p and t fulfil the sublimation-pressure-curve.

Sublimation and

desublimation curve: Temperatur range from T_{\min} to T_t

Pressure range from p_{\min} to p_t

Results for wrong input values

Result **WPTXICE = -1000** or **w_ptx_ICE = -1000** for input values:

Single phase region:

Solid, liquid, overheated steam ($x = -1000$):

- at $p < p_{\min}$ or $p > p_{\max}$
- at $T < T_{\min}$ or $T > T_{\max}$

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $0 < x < 1$, i.e. calculation in the wet steam region not possible!
- at $p = -1000$ and $T < T_t$ or $T > T_{\max}$
- at $t = -1000$ and $p < p_t$ or $p > p_s(T_{\max})$
- at $p < p_t$ or $p > p_s(T_{\max})$
- at $T < T_t$ or $T > T_{\max}$

Melting region ($10 \leq x \leq 11$):

- at $10 < x < 11$, i.e. calculation in the melting region not possible!
- at $p = -1000$ and $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$
- at $t = -1000$ and $p < p_t$ or $p > p_{\max}$
- at $p < p_t$ or $p > p_{\max}$
- at $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$

Sublimation region ($100 \leq x \leq 101$):

- at $100 < x < 101$, i.e. calculation in the sublimation region not possible!
- at $p = -1000$ and $T < T_{\min}$ or $T > T_t$
- at $t = -1000$ and $p < p_{\min}$ or $p > p_t$
- at $p < p_{\min}$ or $p > p_t$
- at $T < T_{\min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Backward Function: Vapor Fraction $x = f(p, h)$

Function Name: **x_ph_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION XPHICE (P,H)**
for call from Fortran **REAL*8 P,H**

Input Values

P – Pressure p in bar

H - Specific enthalpy h in kJ/kg

Result

XPHICE, X or x_ph_ICE – Vapor fraction x in (kg saturated steam/kg wet steam)

Range of Validity (cp. p, t -diagram in chapter 1.2)

Pressure range: from p_t to $p_s(T_{\max})$ for wet steam region
 from p_t to p_{\max} for melting region
 from p_{\min} to p_t for sublimation region

Enthalpy range: from $h < h_{\max} = h(p_{\min}, T_{\max})$ to $h > h_{\min} = h(p_{\min}, T_{\min})$

Temperature range: from T_{\min} to T_{\max} (resulting from internal calculation of the subprograms)

Details on calculating the two phase regions

The two phase regions are calculated automatically by the subprograms. Using the given values for p and h , the program determines whether the point of state to be calculated is located in the single phase region (solid, liquid or steam) or in one of the two phase regions wet steam region, melting region and sublimation region (cp. lg p, h -diagram in chapter 1.2). When calculating a two phase mixture, x will be calculated. If the state point to be calculated is located in the single-phase region the result is set to $x = -1$.

Results for wrong input values

Result **XPHICE = -1** or **x_ph_ICE = -1** for input values:

If the state point to be calculated is located in the single phase region (cp. lg p, h -diagram in chapter 1.2).

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $p < p_t$ or $p > p_s(T_{\max})$
- at calculation result $T < T_t$ or $T > T_{\max}$

Melting region ($10 \leq x \leq 11$):

- at $p < p_t$ or $p > p_{\max}$
- at calculation result $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$

Sublimation region ($100 \leq x \leq 101$):

- at $p < p_{\min}$ or $p > p_t$
- at calculation result $T < T_{\min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Backward Function: Vapor Fraction $x = f(p, s)$

Function Name: **x_ps_ICE**

Subprogram with value of the function: **REAL*8 FUNCTION XPSICE (P,S)**
 for call from Fortran **REAL*8 P,S**

Input Values

P – Pressure p in bar

S - Specific entropy s in kJ/(kg K)

Result

XPSICE or **x_ps_ICE** – Vapor fraction x in (kg saturated steam/kg wet steam)

Range of Validity (cp. p, t -diagram in chapter 1.2)

Pressure range: from p_t to $p_s(T_{\max})$ for wet steam region
 from p_t to p_{\max} for melting region
 from p_{\min} to p_t for sublimation region

Entropy range: from $s < s_{\max} = s(p_{\min}, T_{\max})$ to $s > s_{\min} = s(p_{\min}, T_{\min})$

Temperature range: from T_{\min} to T_{\max} (resulting from internal calculation of the subprograms)

Details on calculating the two phase regions

The two phase regions are calculated automatically by the subprograms. Using the given values for p and s , the program determines whether the point of state to be calculated is located in the single phase region (solid, liquid or steam) or in one of the two phase regions wet steam region, melting region and sublimation region (cp. lg p, h -diagram in chapter 1.2). When calculating a two phase mixture, x will be calculated. If the state point to be calculated is located in the single-phase region the result is set to $x = -1$.

Results for wrong input values

Result **XPSICE = -1** or **x_ps_ICE = -1** for input values:

If the state point to be calculated is located in the single phase region (cp. lg p, h -diagram in chapter 1.2).

Two phase regions:

Wet steam region ($0 \leq x \leq 1$):

- at $p < p_t$ or $p > p_s(T_{\max})$
- at calculation result $T < T_t$ or $T > T_{\max}$

Melting region ($10 \leq x \leq 11$):

- at $p < p_t$ or $p > p_{\max}$
- at calculation result $T > T_t$ or $T < T_{\text{mel}}(p_{\max})$

Sublimation region ($100 \leq x \leq 101$):

- at $p < p_{\min}$ or $p > p_t$
- at calculation result $T < T_{\min}$ or $T > T_t$

References: [1], [2], [6], [7], [8]

Property Libraries for Calculating Heat Cycles, Boilers, Turbines and Refrigerators

Water and Steam

Library LibIF97

- Industrial Formulation IAPWS-IF97 (Revision 2007)
- Supplementary Standards
 - IAPWS-IF97-S01
 - IAPWS-IF97-S03rev
 - IAPWS-IF97-S04
 - IAPWS-IF97-S05
- IAPWS Revised Advisory Note No. 3 on Thermodynamic Derivatives (2008)

Library LibSBTL_IF97 Library LibSBTL_95

Extremely fast property calculations according to the IAPWS Guideline 2015 Spline-based Table Look-up Method (SBTL) applied to the Industrial Formulation IAPWS-IF97 and to the Scientific Formulation IAPWS-95 for Computational Fluid Dynamics and simulating non-stationary processes

Humid Combustion Gas Mixtures

Library LibHuGas

Model: Ideal mixture of the real fluids:
 CO_2 - Span, Wagner H_2O - IAPWS-95
 O_2 - Schmidt, Wagner N_2 - Span et al.
 Ar - Tegeler et al.
 and of the ideal gases:
 SO_2 , CO , Ne
 (Scientific Formulation of Bucker et al.)
 Consideration of:
 • Dissociation from VDI 4670
 • Poynting effect

Humid Air

Library LibHuAir

Model: Ideal mixture of the real fluids:
 • Dry air from Lemmon et al.
 • Steam, water and ice from IAPWS-IF97 and IAPWS-06
 Consideration of:
 • Condensation and freezing of steam
 • Dissociation from VDI 4670
 • Poynting effect from ASHRAE RP-1485

Carbon Dioxide Including Dry Ice

Library LibCO2

Formulation of Span and Wagner (1996)

Seawater

Library LibSeaWa

IAPWS Industrial Formulation 2013

Ice

Library LibICE

Ice from IAPWS-06, Melting and sublimation pressures from IAPWS-08, Water from IAPWS-IF97, Steam from IAPWS-95 and -IF97

Ideal Gas Mixtures

Library LibIdGasMix

Model: Ideal mixture of the ideal gases:

Ar	NO	He	Propylene
Ne	H_2O	F_2	Propane
N_2	SO_2	NH_3	Iso-Butane
O_2	H_2	Methane	n-Butane
CO	H_2S	Ethane	Benzene
CO_2	OH	Ethylene	Methanol
Air			

Consideration of:

- Dissociation from the VDI Guideline 4670

Library LibIDGAS

Model: Ideal gas mixture from VDI Guideline 4670

Consideration of:

- Dissociation from the VDI Guideline 4670

Humid Air

Library ASHRAE LibHuAirProp

Model: Virial equation from ASHRAE Report RP-1485 for real mixture of the real fluids:
 - Dry air
 - Steam

Consideration of:

- Enhancement of the partial saturation pressure of water vapor at elevated total pressures

www.ashrae.org/bookstore

Dry Air Including Liquid Air

Library LibRealAir

Formulation of Lemmon et al. (2000)

Refrigerants

Ammonia

Library LibNH3

Formulation of Tillner-Roth et al. (1993)

R134a

Library LibR134a

Formulation of Tillner-Roth and Baehr (1994)

Iso-Butane

Library LibButane_Iso

Formulation of Bucker and Wagner (2006)

n-Butane

Library LibButane_n

Formulation of Bucker and Wagner (2006)

Mixtures for Absorption Processes

Ammonia/Water Mixtures

Library LibAmWa

IAPWS Guideline 2001 of Tillner-Roth and Friend (1998)

Helmholtz energy equation for the mixing term (also useable for calculating the Kalina Cycle)

Water/Lithium Bromide Mixtures

Library LibWaLi

Formulation of Kim and Infante Ferreira (2004)
 Gibbs energy equation for the mixing term

Liquid Coolants

Liquid Secondary Refrigerants

Library LibSecRef

Liquid solutions of water with

$\text{C}_2\text{H}_6\text{O}_2$	Ethylene glycol
$\text{C}_3\text{H}_8\text{O}_2$	Propylene glycol
$\text{C}_2\text{H}_5\text{OH}$	Ethanol
CH_3OH	Methanol
$\text{C}_3\text{H}_8\text{O}_3$	Glycerol
K_2CO_3	Potassium carbonate
CaCl_2	Calcium chloride
MgCl_2	Magnesium chloride
NaCl	Sodium chloride
$\text{C}_2\text{H}_3\text{KO}_2$	Potassium acetate
CHKO_2	Potassium formate
LiCl	Lithium chloride
NH_3	Ammonia

Formulation of the International Institute of Refrigeration (IIR 2010)

Ethanol**Library LibC2H5OH**

Formulation of
Schroeder (2012)

Methanol**Library LibCH3OH**

Formulation of
de Reuck and Craven (1993)

Propane**Library LibPropane**

Formulation of
Lemmon et al. (2009)

Siloxanes as ORC Working Fluids

Octamethylcyclotetrasiloxane $C_8H_{24}O_4Si_4$ **Library LibD4**

Decamethylcyclopentasiloxane $C_{10}H_{30}O_5Si_5$ **Library LibD5**

Tetradecamethylhexasiloxane $C_{14}H_{42}O_6Si_6$ **Library LibMD4M**

Hexamethyldisiloxane $C_6H_{18}OSi_2$ **Library LibMM**

Formulation of Colonna et al. (2006)

Dodecamethylcyclohexasiloxane $C_{12}H_{36}O_6Si_6$ **Library LibD6**

Decamethyltetrasiloxane $C_{10}H_{30}O_3Si_4$ **Library LibMD2M**

Dodecamethylpentasiloxane $C_{12}H_{36}O_4Si_5$ **Library LibMD3M**

Octamethyltrisiloxane $C_8H_{24}O_2Si_3$ **Library LibMDM**

Formulation of Colonna et al. (2008)

Nitrogen and Oxygen**Libraries****LibN2 and LibO2**

Formulations of Span et al. (2000)
and Schmidt and Wagner (1985)

Hydrogen**Library LibH2**

Formulation of
Leachman et al. (2009)

Helium**Library LibHe**

Formulation of
Arp et al. (1998)

Hydrocarbons

Decane $C_{10}H_{22}$ **Library LibC10H22**

Isopentane C_5H_{12} **Library LibC5H12_ISO**

Neopentane C_5H_{12} **Library LibC5H12_NEO**

Isohexane C_6H_{14} **Library LibC6H14**

Toluene C_7H_8 **Library LibC7H8**

Formulation of Lemmon and Span (2006)

Further Fluids

Carbon monoxide **CO** **Library LibCO**

Carbonyl sulfide **COS** **Library LibCOS**

Hydrogen sulfide **H₂S** **Library LibH2S**

Nitrous oxide **N₂O** **Library LibN2O**

Sulfur dioxide **SO₂** **Library LibSO2**

Acetone C_3H_6O **Library LibC3H6O**

Formulation of Lemmon and Span (2006)

For more information please contact:

KCE-ThermoFluidProperties UG (limited liability) & Co. KG
Professor Hans-Joachim Kretschmar

Wallotstr. 3
01307 Dresden, Germany

Internet: www.thermofluidprop.com

E-mail: info@thermofluidprop.com

Phone: +49-351-27597860

Mobile: +49-172-7914607

Fax: +49-3222-4262250

The following thermodynamic and transport properties can be calculated^a:**Thermodynamic Properties**

- Vapor pressure p_s
- Saturation temperature T_s
- Density ρ
- Specific volume v
- Enthalpy h
- Internal energy u
- Entropy s
- Exergy e
- Isobaric heat capacity c_p
- Isochoric heat capacity c_v
- Isentropic exponent κ
- Speed of sound w
- Surface tension σ

Transport Properties

- Dynamic viscosity η
- Kinematic viscosity ν
- Thermal conductivity λ
- Prandtl number Pr

Backward Functions

- $T, v, s(p, h)$
- $T, v, h(p, s)$
- $p, T, v(h, s)$
- $p, T(v, h)$
- $p, T(v, u)$


Thermodynamic Derivatives

- Partial derivatives can be calculated.

^a Not all of these property functions are available in all property libraries.


Property Software for Calculating Heat Cycles, Boilers, Turbines and Refrigerators

Add-In FluidEXL^{Graphics} for Excel[®]

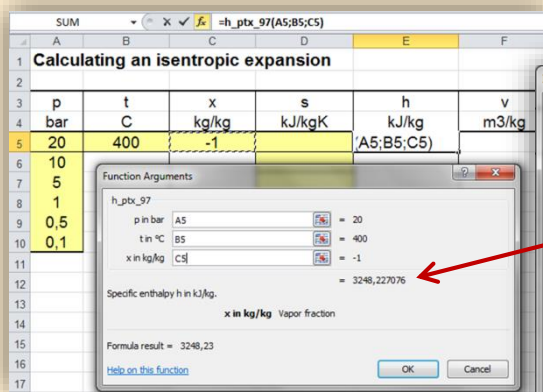


Menu for the input of given property values

Choosing a property library and a function

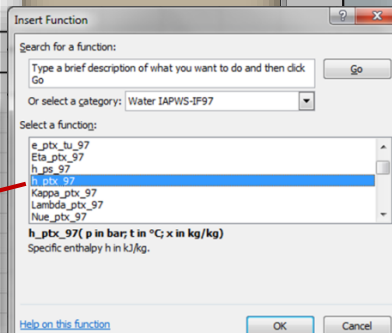


Displaying the calculated values in diagrams

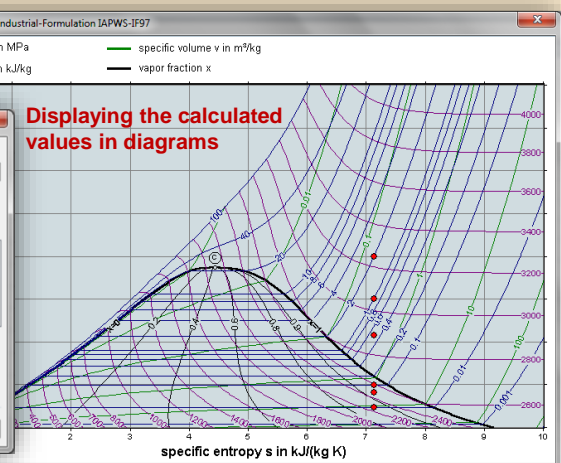

Add-In FluidMAT for Mathcad[®]


The property libraries can be used in Mathcad[®].

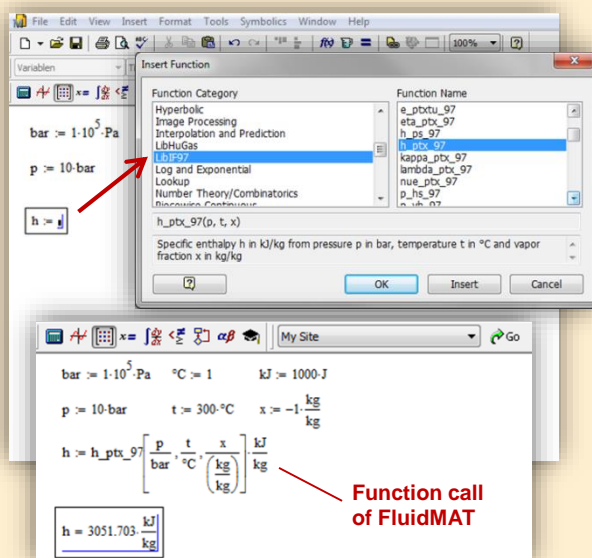

Function call of FluidMAT

Add-In FluidLAB for MATLAB[®]


Using the Add-In FluidLAB the property functions can be called in MATLAB[®].

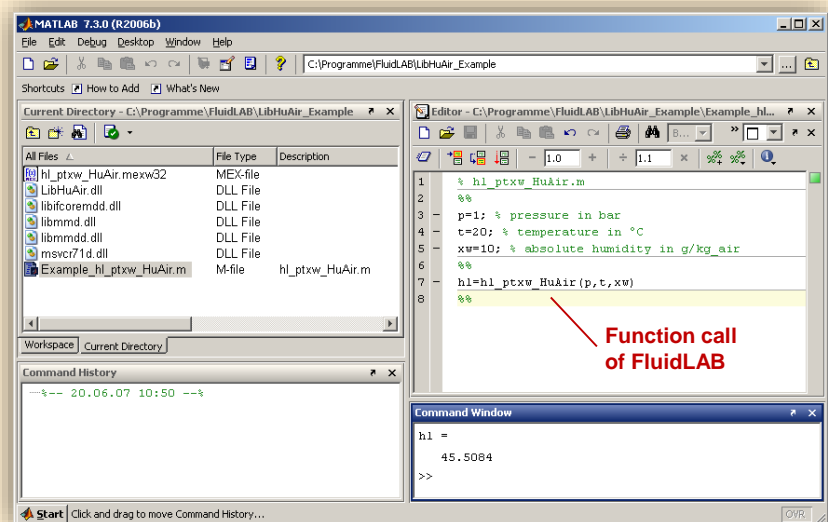

Function call of FluidLAB


Add-On FluidVIEW for LabVIEW[™]

The property functions can be calculated in LabVIEW[™].

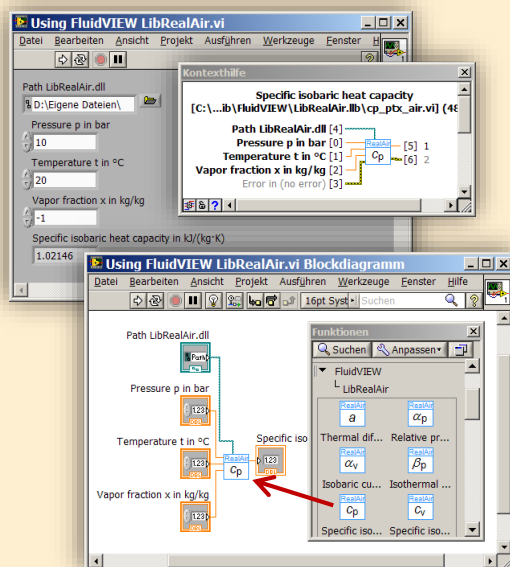


Add-In FluidDYM for DYMOLA[®] (Modelica) and SimulationX[®]


The property functions can be called in DYMOLA[®] and SimulationX[®].

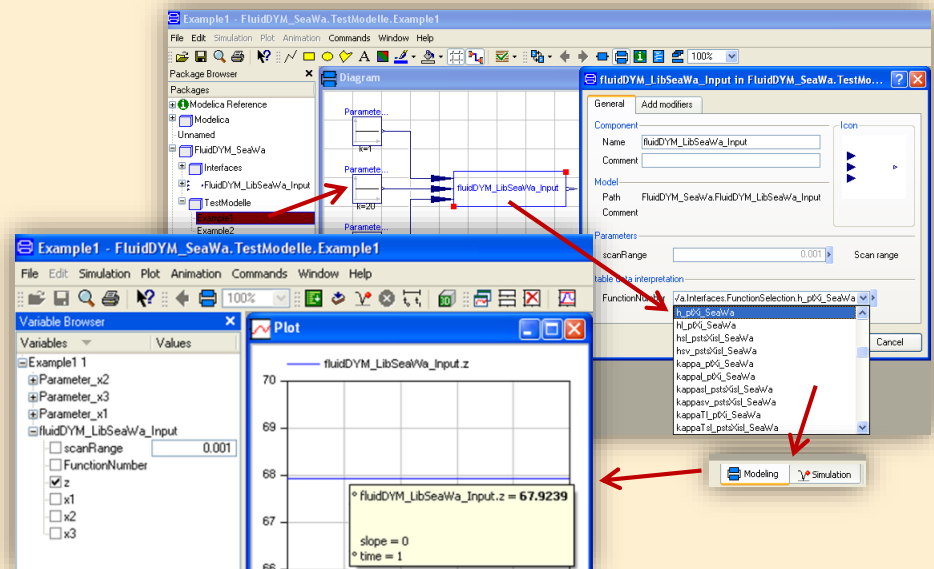

Add-In FluidEES for Engineering Equation Solver®

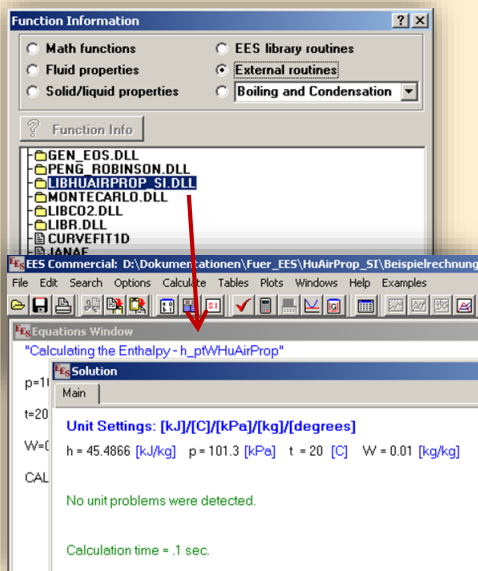

App International Steam Tables for iPhone, iPad, iPod touch, Android Smartphones and Tablets

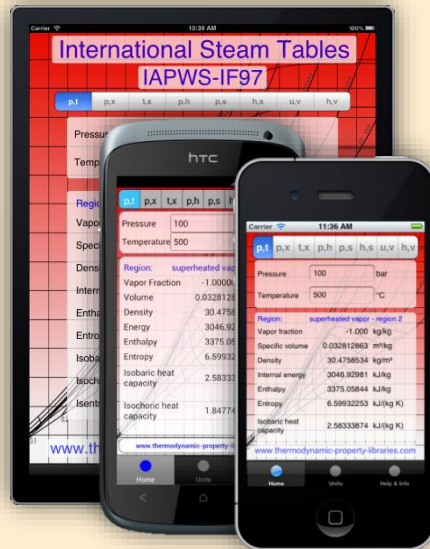

Online Property Calculator at www.thermofluidprop.com

Zittau's Fluid Property Calculator

Fluid:

Function:

Unit System:

Enter given values: [Range of validity](#)

Pressure p: bar

Temperature t: °C

Vapor fraction x: kg/kg

Calculate / Recalculate

Result:

Specific enthalpy h = 3097.38 kJ/kg

For further information on property libraries available for EXCEL®, MATLAB®, Mathcad®, Engineering Equation Solver®, DYMOLA® (Modelica), SimulationX®, and LabView® click [here](#)

An App for calculating steam properties on iPhone, iPad, and iPod touch can be found [here](#)

PDF with the description

© Zittau/Görlitz University of Applied Sciences
Faculty of Mechanical Engineering
Department of Technical Thermodynamics
Prof. Hans-Joachim Kretzschmar
Dr. Ines Stöcker
Programmer: Joachim Posselt

Tel.: +49-3583-61-1946 or -1981
Fax: +49-3583-61-1946
E-mail: info@thermofluidprop.com
www.thermofluidprop.com
www.thermofluidprop.com
www.thermofluidprop.com

Property Software for Pocket Calculators

FluidCasio



fx 9750 G II CFX 9850 fx-GG20 CFX 9860 G Graph 85 ALGEBRA FX 2.0

FluidHP



HP 48 HP 49

FluidTI



TI Nspire CX CAS TI 83 TI 84 TI 89 TI 92

For more information please contact:

KCE-ThermoFluidProperties UG (limited liability) & Co. KG
Professor Hans-Joachim Kretzschmar

Wallotstr. 3
01307 Dresden, Germany

Internet: www.thermofluidprop.com
E-mail: info@thermofluidprop.com
Phone: +49-351-27597860
Mobile: +49-172-7914607
Fax: +49-3222-4262250

The following thermodynamic and transport properties^a can be calculated in Excel®, MATLAB®, Mathcad®, Engineering Equation Solver® (EES), DYMOLA® (Modelica), SimulationX® and LabVIEW™:

Thermodynamic Properties

- Vapor pressure p_s
- Saturation temperature T_s
- Density ρ
- Specific volume v
- Enthalpy h
- Internal energy u
- Entropy s
- Exergy e
- Isobaric heat capacity c_p
- Isochoric heat capacity c_v
- Isentropic exponent κ
- Speed of sound w
- Surface tension σ

Transport Properties

- Dynamic viscosity η
- Kinematic viscosity ν
- Thermal conductivity λ
- Prandtl number Pr

Backward Functions

- $T, v, s(p, h)$
- $T, v, h(p, s)$
- $p, T, v(h, s)$
- $p, T(v, h)$
- $p, T(v, u)$

Thermodynamic Derivatives

- Partial derivatives can be calculated.

^a Not all of these property functions are available in all property libraries.

5. References

- [1] IAPWS:
Revised Release on the IAPWS Industrial Formulation 1997 for the Thermodynamic Properties of Water and Steam IAPWS-IF97.
Available at the IAPWS Website <http://www.iapws.org>
- [2] Wagner, W.; Kretzschmar, H.-J.:
International Steam Tables.
Springer-Verlag, Berlin (2008)
- [3] IAPWS:
Release on the IAPWS Formulation 2011 for the Thermal Conductivity of Ordinary Water Substance.
Available at the IAPWS Website <http://www.iapws.org>.
- [4] IAPWS:
Release on the IAPWS Formulation 2008 for the Viscosity of Ordinary Water Substance.
IAPWS Secretariat, Dooley, B., EPRI, Palo Alto CA, (1997)
- [5] IAPWS:
Release on Surface Tension of Ordinary Water Substance 1994.
Available at the IAPWS Website <http://www.iapws.org>.
- [6] IAPWS:
Revised Release on the IAPWS Formulation 1995 for the Thermodynamic Properties of Ordinary Water Substance for General and Scientific Use.
Available at the IAPWS Website <http://www.iapws.org>
- [7] IAPWS:
Revised Release on the Equation of State 2006 for H₂O Ice Ih.
Available at the IAPWS Website <http://www.iapws.org>
- [8] IAPWS:
Revised Release 2008 on the Pressure along the Melting and Sublimation Curves of Ordinary Water Substance.
Available at the IAPWS Website <http://www.iapws.org>

6. Satisfied Customers

Date: 05/2018

The following companies and institutions use the property libraries

- FluidEXL *Graphics* for Excel®
- FluidLAB for MATLAB®
- FluidMAT for Mathcad®
- FluidEES for Engineering Equation Solver® EES
- FluidDYM for Dymola® (Modelica) and SimulationX®
- FluidVIEW for LabVIEW™.

2018

Universität Madrid, Madrid, Spanien	05/2018
HS Zittau/ Görlitz, Fakultät Wirtschaft, Zittau	05/2018
HS Niederrhein, Krefeld	05/2018
GRS, Köln	03/2018
RONAL AG, Härklingen, Schweiz	02/2018
Ingenieurbüro Leipert, Riegelsberg	02/2018
AIXPROCESS, Aachen	02/2018
KRONES, Neutraubling	02/2018
Doosan Lentjes, Ratingen	01/2018

2017

Compact Kältetechnik, Dresden	12/2017
Endress + Hauser Messtechnik GmbH +Co. KG, Hannover	12/2017
TH Mittelhessen, Gießen	11/2017
Haarslev Industries, Sønderød, Denmark	11/2017
Hochschule Zittau/Görlitz, Fachgebiet Energiesystemtechnik	11/2017
ATESTEO, Alsdorf	10/2017
Wijbenga, PC Geldermalsen, Netherlands	10/2017
Fels-Werke GmbH, Elbingerode	10/2017
KIT Karlsruhe, Institute für Neutronenphysik und Reaktortechnik	09/2017
Air-Consult, Jena	09/2017
Papierfabrik Koehler, Oberkirch	09/2017
ZWILAG, Würenlingen, Switzerland	09/2017
TLK-Thermo Universität Braunschweig, Braunschweig	08/2017
Fichtner IT Consulting AG, Stuttgart	07/2017
Hochschule Ansbach, Ansbach	06/2017
RONAL, Härkingen, Switzerland	06/2017
BORSIG Service, Berlin	06/2017

BOGE Kompressoren, Bielefeld	06/2017
STEAG Energy Services, Zwingenberg	06/2017
CES clean energy solutions, Wien, Austria	04/2017
Princeton University, Princeton, USA	04/2017
B2P Bio-to-Power, Wadersloh	04/2017
TU Dresden, Institute for Energy Engineering, Dresden	04/2017
SAINT-GOBAIN, Vaujours, France	03/2017
TU Bergakademie Freiberg, Chair of Thermodynamics, Freiberg	03/2017
SCHMIDT + PARTNER, Therwil, Switzerland	03/2017
KAESER Kompressoren, Gera	03/2017
F&R, Praha, Czech Republic	03/2017
ULT Umwelt-Lufttechnik, Löbau	02/2017
JS Energie & Beratung, Erding	02/2017
Kelvion Braze PHE, Nobitz-Wilchwitz	02/2017
MTU Aero Engines, München	02/2017
Hochschule Zittau/Görlitz, IPM	01/2017
CombTec ProCE, Zittau	01/2017
SHELL Deutschland Oil, Wesseling	01/2017
MARTEC Education Center, Frederikshaven, Denmark	01/2017
SynErgy Thermal Management, Krefeld	01/2017

2016

BOGE Druckluftsysteme, Bielefeld	12/2016
BFT Planung, Aachen	11/2016
Midiplan, Bietigheim-Bissingen	11/2016
BBE Barnich IB	11/2016
Wenisch IB,	11/2016
INL, Idaho Falls	11/2016
TU Kältetechnik, Dresden	11/2016
Kopf SynGas, Sulz	11/2016
INTVEN, Bellevue (USA)	11/2016
DREWAG Dresden, Dresden	10/2016
AGO AG Energie+Anlagen, Kulmbach	10/2016
Universität Stuttgart, ITW, Stuttgart	09/2016
Pöry Deutschland GmbH, Dresden	09/2016
Siemens AG, Erlangen	09/2016
BASF über Fichtner IT Consulting AG	09/2016
B+B Engineering GmbH, Magdeburg	09/2016
Wilhelm Büchner Hochschule, Pfungstadt	08/2016

Webasto Thermo & Comfort SE, Gliching	08/2016
TU Dresden, Dresden	08/2016
Endress+Hauser Messtechnik GmbH+Co. KG, Hannover	08/2016
D + B Kältetechnik, Althausen	07/2016
Fichtner IT Consulting AG, Stuttgart	07/2016
AB Electrolux, Krakow, Poland	07/2016
ENEXIO Germany GmbH, Herne	07/2016
VPC GmbH, Vetschau/Spreewald	07/2016
INWAT, Lodz, Poland	07/2016
E.ON SE, Düsseldorf	07/2016
Planungsbüro Waidhas GmbH, Chemnitz	07/2016
EEB Enerko, Aldershoven	07/2016
IHEBA Naturenergie GmbH & Co. KG, Pfaffenhofen	07/2016
SSP Kälteplaner AG, Wolfertschwenden	07/2016
EEB ENERKO Energiewirtschaftliche Beratung GmbH, Berlin	07/2016
BOGE Kompressoren Otto BOGE GmbH & Co KG, Bielefeld	06/2016
Universidad Carlos III de Madrid, Madrid, Spain	04/2016
INWAT, Lodzi, Poland	04/2016
Planungsbüro Waidhas GmbH, Chemnitz	04/2016
STEAG Energy Services GmbH, Laszlo Küppers, Zwingenberg	03/2016
WULFF & UMAG Energy Solutions GmbH, Husum	03/2016
FH Bielefeld, Bielefeld	03/2016
EWT Eckert Wassertechnik GmbH, Celle	03/2016
ILK Institut für Luft- und Kältetechnik GmbH, Dresden	02/2016, 06/2016 (2x)
IEV KEMA - DNV GV – Energie, Dresden	02/2016
Allborg University, Department of Energie, Aalborg, Denmark	02/2016
G.A.M. Heat GmbH, Gräfenhainichen	02/2016
Institut für Luft- und Kältetechnik, Dresden	02/2016, 05/2016, 06/2016
Bosch, Stuttgart	02/2016
INL Idaho National Laboratory, Idaho, USA	11/2016, 01/2016
Friedl ID, Wien, Austria	01/2016
Technical University of Dresden, Dresden	01/2016

2015

EES Enerko, Aachen	12/2015
Ruldolf IB, Strau, Austria	12/2015
Allborg University, Department of Energie, Aalborg, Denmark	12/2015
University of Lyubljana, Slovenia	12/2015
Steinbrecht IB, Berlin	11/2015
Universidad Carlos III de Madrid, Madrid, Spain	11/2015
STEAK, Essen	11/2015

Bosch, Lohmar	10/2015
Team Turbo Machines, Rouen, France	09/2015
BTC – Business Technology Consulting AG, Oldenburg	07/2015
KIT Karlsruhe Institute of Technology, Eggenstein-Leopoldshafen	07/2015
ILK, Dresden	07/2015
Schniewindt GmbH & Co. KG, Neuenwalde	08/2015

2014

PROJEKTPLAN, Dohna	04/2014
Technical University of Vienna, Austria	04/2014
MTU Aero Engines AG, Munich	04/2014
GKS, Schweinfurt	03/2014
Technical University of Nuremberg	03/2014
EP-E, Niederstetten	03/2014
Rückert NatUrgas GmbH, Lauf	03/2014
YESS-World, South Korea	03/2014
ZAB, Dessau	02/2014
KIT-TVT, Karlsruhe	02/2014
Stadtwerke Neuburg	02/2014
COMPAREX, Leipzig for RWE Essen	02/2014
Technical University of Prague, Czech Republic	02/2014
HS Augsburg	02/2014
Envi-con, Nuremberg	01/2014
DLR, Stuttgart	01/2014
Doosan Lentjes, Ratingen	01/2014
Technical University of Berlin	01/2014
Technical University of Munich	01/2014
Technical University of Braunschweig	01/2014
M&M Turbinentechnik, Bielefeld	01/2014

2013

TRANTER-GmbH, Artern	12/2013
SATAKE, Shanghai, China	12/2013
VOITH, Kunshan, China	12/2013
ULT, Löbau	12/2013
MAN, Copenhagen, Dänemark	11/2013
DREWAG, Dresden	11/2013
Haarslev Industries, Herlev, Dänemark	11/2013
STEAG, Herne	11/2013, 12/2013
Ingersoll-Rand, Oberhausen	11/2013
Wilhelm-Büchner HS, Darmstadt	10/2013

IAV, Chemnitz	10/2013
Technical University of Regensburg	10/2013
PD-Energy, Bitterfeld	09/2013
Thermofin, Heinsdorfergrund	09/2013
SHI, New Jersey, USA	09/2013
M&M Turbinentechnik, Bielefeld	08/2013
BEG-BHV, Bremerhaven	08/2013
TIG-Group, Husum	08/2013
COMPAREX, Leipzig	08/2013, 11/2013
for RWE Essen	12/2013
University of Budapest, Hungary	08/2013
Siemens, Frankenthal	08/2013, 10/2013
	11/2013
VGB, Essen	07/2013, 11/2013
Brunner Energieberatung, Zurich, Switzerland	07/2013
Technical University of Deggendorf	07/2013
University of Maryland, USA	07/2013, 08/2013
University of Princeton, USA	07/2013
NIST, Boulder, USA	06/2013
IGUS GmbH, Dresden	06/2013
BHR Bilfinger, Essen	06/2013
SÜDSALZ, Bad Friedrichshall	06/2013, 12/2013
Technician School of Berlin	05/2013
KIER, Gajeong-ro, Südkorea	05/2013
Schwing/Stetter GmbH, Memmingen	05/2013
Vattenfall, Berlin	05/2013
AUTARK, Kleinmachnow	05/2013
STEAG, Zwingenberg	05/2013
Hochtief, Düsseldorf	05/2013
University of Stuttgart	04/2013
Technical University -Bundeswehr, Munich	04/2013
Rerum Cognitio Forschungszentrum, Frankfurt	04/2013
Kältetechnik Dresden + Bremen, Alfhausen	04/2013
University Auckland, New Zealand	04/2013
MASDAR Institut, Abu Dhabi, United Arab Emirates	03/2013
Simpelkamp, Dresden	02/2013
VEO, Eisenhüttenstadt	02/2013
ENTEC, Auerbach	02/2013
Caterpillar, Kiel	02/2013
Technical University of Wismar	02/2013
Technical University of Dusseldorf	02/2013

ILK, Dresden	01/2013, 08/2013
Fichtner IT, Stuttgart	01/2013, 11/2013
Schnepf Ingeniuerbüro, Nagold	01/2013
Schütz Engineering, Wadgassen	01/2013
Endress & Hauser, Reinach, Switzerland	01/2013
Oschatz GmbH, Essen	01/2013
frischli Milchwerke, Rehburg-Loccum	01/2013

2012

Voith, Bayreuth	12/2012
Technical University of Munich	12/2012
Dillinger Huette	12/2012
University of Stuttgart	11/2012
Siemens, Muehlheim	11/2012
Sennheiser, Hannover	11/2012
Oschatz GmbH, Essen	10/2012
Fichtner IT, Stuttgart	10/2012, 11/2012
Helbling Technik AG, Zurich, Switzerland	10/2012
University of Duisburg	10/2012
Rerum Cognitio Forschungszentrum, Frankfurt	09/2012
Pöry Deutschland GmbH, Dresden	08/2012
Extracciones, Guatemala	08/2012
RWE, Essen	08/2012
Weghaus Consulting Engineers, Wuerzburg	08/2012
GKS, Schweinfurt	07/2012
COMPAREX, Leipzig for RWE Essen	07/2012
GEA, Nobitz	07/2012
Meyer Werft, Papenburg	07/2012
STEAG, Herne	07/2012
GRS, Cologne	06/2012
Fichtner IT Consult, Chennai, India	06/2012
Siemens, Freiburg	06/2012
Nikon Research of America, Belmont, USA	06/2012
Niederrhein University of Applied Sciences, Krefeld	06/2012
STEAG, Zwingenberg	06/2012
Mainova, Frankfurt on Main via Fichtner IT Consult	05/2012
Endress & Hauser	05/2012
PEU, Espenheim	05/2012
Luzern University of Applied Sciences, Switzerland	05/2012

BASF, Ludwigshafen (general license) via Fichtner IT Consult	05/2012
SPX Balcke-Dürr, Ratingen	05/2012, 07/2012
Gruber-Schmidt, Wien, Austria	04/2012
Vattenfall, Berlin	04/2012
ALSTOM, Baden	04/2012
SKW, Piesteritz	04/2012
TERA Ingegneria, Trento, Italy	04/2012
Siemens, Erlangen	04/2012, 05/2012
LAWI Power, Dresden	04/2012
Stadtwerke Leipzig	04/2012
SEITZ, Wetzikon, Switzerland	03/2012, 07/2012
M & M, Bielefeld	03/2012
Sennheiser, Wedemark	03/2012
SPG, Montreuil Cedex, France	02/2012
German Destillation, Sprendlingen	02/2012
Lopez, Munguia, Spain	02/2012
Endress & Hauser, Hannover	02/2012
Palo Alto Research Center, USA	02/2012
WIPAK, Walsrode	02/2012
Freudenberg, Weinheim	01/2012
Fichtner, Stuttgart	01/2012
airinotec, Bayreuth	01/2012, 07/2012
University Auckland, New Zealand	01/2012
VPC, Vetschau	01/2012
Franken Guss, Kitzingen	01/2012

2011

XRG-Simulation, Hamburg	12/2011
Smurfit Kappa PPT, AX Roermond, Netherlands	12/2011
AWTEC, Zurich, Switzerland	12/2011
eins-energie, Bad Elster	12/2011
BeNow, Rodenbach	11/2011
Luzern University of Applied Sciences, Switzerland	11/2011
GMVA, Oberhausen	11/2011
CCI, Karlsruhe	10/2011
W.-Büchner University of Applied Sciences, Pfungstadt	10/2011
PLANAIR, La Sagne, Switzerland	10/2011
LAWI, Dresden	10/2011
Lopez, Munguia, Spain	10/2011
University of KwaZulu-Natal, Westville, South Africa	10/2011

Voith, Heidenheim	09/2011
SpgBe Montreal, Canada	09/2011
SPG TECH, Montreuil Cedex, France	09/2011
Voith, Heidenheim-Mergelstetten	09/2011
MTU Aero Engines, Munich	08/2011
MIBRAG, Zeitz	08/2011
RWE, Essen	07/2011
Fels, Elingerode	07/2011
Weihenstephan University of Applied Sciences	07/2011, 09/2011 10/2011
Forschungszentrum Juelich	07/2011
RWTH Aachen University	07/2011, 08/2011
INNEO Solutions, Ellwangen	06/2011
Caliqua, Basel, Switzerland	06/2011
Technical University of Freiberg	06/2011
Fichtner IT Consulting, Stuttgart	05/2011, 06/2011, 08/2011
Salzgitter Flachstahl, Salzgitter	05/2011
Helbling Beratung & Bauplanung, Zurich, Switzerland	05/2011
INEOS, Cologne	04/2011
Enseleit Consulting Engineers, Siebigerode	04/2011
Witt Consulting Engineers, Stade	03/2011
Helbling, Zurich, Switzerland	03/2011
MAN Diesel, Copenhagen, Denmark	03/2011
AGO, Kulmbach	03/2011
University of Duisburg	03/2011, 06/2011
CCP, Marburg	03/2011
BASF, Ludwigshafen	02/2011
ALSTOM Power, Baden, Switzerland	02/2011
Universität der Bundeswehr, Munich	02/2011
Calorifer, Elgg, Switzerland	01/2011
STRABAG, Vienna, Austria	01/2011
TUEV Sued, Munich	01/2011
ILK Dresden	01/2011
Technical University of Dresden	01/2011, 05/2011 06/2011, 08/2011

2010

Umweltinstitut Neumarkt	12/2010
YIT Austria, Vienna, Austria	12/2010
MCI Innsbruck, Austria	12/2010

University of Stuttgart	12/2010
HS Cooler, Wittenburg	12/2010
Visteon, Novi Jicin, Czech Republic	12/2010
CompuWave, Brunntal	12/2010
Stadtwerke Leipzig	12/2010
MCI Innsbruck, Austria	12/2010
EVONIK Energy Services, Zwingenberg	12/2010
Caliqua, Basel, Switzerland	11/2010
Shanghai New Energy Resources Science & Technology, China	11/2010
Energieversorgung Halle	11/2010
Hochschule für Technik Stuttgart, University of Applied Sciences	11/2010
Steinmueller, Berlin	11/2010
Amberg-Weiden University of Applied Sciences	11/2010
AREVA NP, Erlangen	10/2010
MAN Diesel, Augsburg	10/2010
KRONES, Neutraubling	10/2010
Vaillant, Remscheid	10/2010
PC Ware, Leipzig	10/2010
Schubert Consulting Engineers, Weißenberg	10/2010
Fraunhofer Institut UMSICHT, Oberhausen	10/2010
Behringer Consulting Engineers, Tagmersheim	09/2010
Saacke, Bremen	09/2010
WEBASTO, Neubrandenburg	09/2010
Concordia University, Montreal, Canada	09/2010
Compañía Eléctrica de Sochagota, Bogota, Colombia	08/2010
Hannover University of Applied Sciences	08/2010
ERGION, Mannheim	07/2010
Fichtner IT Consulting, Stuttgart	07/2010
TF Design, Matieland, South Africa	07/2010
MCE, Berlin	07/2010, 12/2010
IPM, Zittau/Goerlitz University of Applied Sciences	06/2010
TUEV Sued, Dresden	06/2010
RWE IT, Essen	06/2010
Glen Dimplex, Kulmbach	05/2010, 07/2010
	10/2010
Hot Rock, Karlsruhe	05/2010
Darmstadt University of Applied Sciences	05/2010
Voith, Heidenheim	04/2010
CombTec, Zittau	04/2010
University of Glasgow, Great Britain	04/2010
Universitaet der Bundeswehr, Munich	04/2010

Technical University of Hamburg-Harburg	04/2010
Vattenfall Europe, Berlin	04/2010
HUBER Consulting Engineers, Berching	04/2010
VER, Dresden	04/2010
CCP, Marburg	03/2010
Offenburg University of Applied Sciences	03/2010
Technical University of Berlin	03/2010
NIST Boulder CO, USA	03/2010
Technical University of Dresden	02/2010
Siemens Energy, Nuremberg	02/2010
Augsburg University of Applied Sciences	02/2010
ALSTOM Power, Baden, Switzerland	02/2010, 05/2010
MIT Massachusetts Institute of Technology Cambridge MA, USA	02/2010
Wieland Werke, Ulm	01/2010
Siemens Energy, Goerlitz	01/2010, 12/2010
Technical University of Freiberg	01/2010
ILK, Dresden	01/2010, 12/2010
Fischer-Uhrig Consulting Engineers, Berlin	01/2010

2009

ALSTOM Power, Baden, Schweiz	01/2009, 03/2009 05/2009
Nordostschweizerische Kraftwerke AG, Doettingen, Switzerland	02/2009
RWE, Neurath	02/2009
Brandenburg University of Technology, Cottbus	02/2009
Hamburg University of Applied Sciences	02/2009
Kehrein, Moers	03/2009
EPP Software, Marburg	03/2009
Bernd Münstermann, Telgte	03/2009
Suedzucker, Zeitz	03/2009
CPP, Marburg	03/2009
Gelsenkirchen University of Applied Sciences	04/2009
Regensburg University of Applied Sciences	05/2009
Gatley & Associates, Atlanta, USA	05/2009
BOSCH, Stuttgart	06/2009, 07/2009
Dr. Nickolay, Consulting Engineers, Gommersheim	06/2009
Ferrostal Power, Saarlouis	06/2009
BHR Bilfinger, Essen	06/2009
Intraserv, Wiesbaden	06/2009
Lausitz University of Applied Sciences, Senftenberg	06/2009
Nuernberg University of Applied Sciences	06/2009

Technical University of Berlin	06/2009
Fraunhofer Institut UMSICHT, Oberhausen	07/2009
Bischoff, Aurich	07/2009
Fichtner IT Consulting, Stuttgart	07/2009
Techsoft, Linz, Austria	08/2009
DLR, Stuttgart	08/2009
Wienstrom, Vienna, Austria	08/2009
RWTH Aachen University	09/2009
Vattenfall, Hamburg	10/2009
AIC, Chemnitz	10/2009
Midiplan, Bietigheim-Bissingen	11/2009
Institute of Air Handling and Refrigeration ILK, Dresden	11/2009
FZD, Rossendorf	11/2009
Techgroup, Ratingen	11/2009
Robert Sack, Heidelberg	11/2009
EC, Heidelberg	11/2009
MCI, Innsbruck, Austria	12/2009
Saacke, Bremen	12/2009
ENERKO, Aldenhoven	12/2009

2008

Pink, Langenwang	01/2008
Fischer-Uhrig, Berlin	01/2008
University of Karlsruhe	01/2008
MAAG, Kuesnacht, Switzerland	02/2008
M&M Turbine Technology, Bielefeld	02/2008
Lentjes, Ratingen	03/2008
Siemens Power Generation, Goerlitz	04/2008
Evonik, Zwingenberg (general EBSILON program license)	04/2008
WEBASTO, Neubrandenburg	04/2008
CFC Solutions, Munich	04/2008
RWE IT, Essen	04/2008
Rerum Cognitio, Zwickau	04/2008, 05/2008
ARUP, Berlin	05/2008
Research Center, Karlsruhe	07/2008
AWECO, Neukirch	07/2008
Technical University of Dresden,	07/2008
Professorship of Building Services	
Technical University of Cottbus,	07/2008, 10/2008
Chair in Power Plant Engineering	
Ingersoll-Rand, Unicov, Czech Republic	08/2008

Technip Benelux BV, Zoetermeer, Netherlands	08/2008
Fennovoima Oy, Helsinki, Finland	08/2008
Fichtner Consulting & IT, Stuttgart	09/2008
PEU, Espenhain	09/2008
Poyry, Dresden	09/2008
WINGAS, Kassel	09/2008
TUEV Sued, Dresden	10/2008
Technical University of Dresden, Professorship of Thermic Energy Machines and Plants	10/2008, 11/2008
AWTEC, Zurich, Switzerland	11/2008
Siemens Power Generation, Erlangen	12/2008

2007

Audi, Ingolstadt	02/2007
ANO Abfallbehandlung Nord, Bremen	02/2007
TUEV NORD SysTec, Hamburg	02/2007
VER, Dresden	02/2007
Technical University of Dresden, Chair in Jet Propulsion Systems	02/2007
Redacom, Nidau, Switzerland	02/2007
Universität der Bundeswehr, Munich	02/2007
Maxxtec, Sinsheim	03/2007
University of Rostock, Chair in Technical Thermodynamics	03/2007
AGO, Kulmbach	03/2007
University of Stuttgart, Chair in Aviation Propulsions	03/2007
Siemens Power Generation, Duisburg	03/2007
ENTHAL Haustechnik, Rees	05/2007
AWECO, Neukirch	05/2007
ALSTOM, Rugby, Great Britain	06/2007
SAAS, Possendorf	06/2007
Grenzebach BSH, Bad Hersfeld	06/2007
Reichel Engineering, Haan	06/2007
Technical University of Cottbus, Chair in Power Plant Engineering	06/2007
Voith Paper Air Systems, Bayreuth	06/2007
Egger Holzwerkstoffe, Wismar	06/2007
Tissue Europe Technologie, Mannheim	06/2007
Dometic, Siegen	07/2007
RWTH Aachen University, Institute for Electrophysics	09/2007
National Energy Technology Laboratory, Pittsburg, USA	10/2007
Energieversorgung Halle	10/2007
AL-KO, Jettingen	10/2007
Grenzebach BSH, Bad Hersfeld	10/2007

Wiesbaden University of Applied Sciences, Department of Engineering Sciences	10/2007
Endress+Hauser Messtechnik, Hannover	11/2007
Munich University of Applied Sciences, Department of Mechanical Engineering	11/2007
Rerum Cognitio, Zwickau	12/2007
Siemens Power Generation, Erlangen	11/2007
University of Rostock, Chair in Technical Thermodynamics	11/2007, 12/2007

2006

STORA ENSO Sachsen, Eilenburg	01/2006
Technical University of Munich, Chair in Energy Systems	01/2006
NUTEC Engineering, Bisikon, Switzerland	01/2006, 04/2006
Conwel eco, Bochov, Czech Republic	01/2006
Offenburg University of Applied Sciences	01/2006
KOCH Transporttechnik, Wadgassen	01/2006
BEG Bremerhavener Entsorgungsgesellschaft	02/2006
Deggendorf University of Applied Sciences, Department of Mechanical Engineering and Mechatronics	02/2006
University of Stuttgart,	02/2006
Department of Thermal Fluid Flow Engines	
Technical University of Munich,	02/2006
Chair in Apparatus and Plant Engineering	
Energietechnik Leipzig (company license),	02/2006
Siemens Power Generation, Erlangen	02/2006, 03/2006
RWE Power, Essen	03/2006
WAETAS, Pobershau	04/2006
Siemens Power Generation, Goerlitz	04/2006
Technical University of Braunschweig,	04/2006
Department of Thermodynamics	
EnviCon & Plant Engineering, Nuremberg	04/2006
Brassel Engineering, Dresden	05/2006
University of Halle-Merseburg,	05/2006
Department of USET Merseburg incorporated society	
Technical University of Dresden,	05/2006
Professorship of Thermic Energy Machines and Plants	
Fichtner Consulting & IT Stuttgart (company licenses and distribution)	05/2006
Suedzucker, Ochsenfurt	06/2006
M&M Turbine Technology, Bielefeld	06/2006
Feistel Engineering, Volkach	07/2006
ThyssenKrupp Marine Systems, Kiel	07/2006

Caliqua, Basel, Switzerland (company license)	09/2006
Atlas-Stord, Rodovre, Denmark	09/2006
Konstanz University of Applied Sciences, Course of Studies Construction and Development	10/2006
Siemens Power Generation, Duisburg	10/2006
Hannover University of Applied Sciences, Department of Mechanical Engineering	10/2006
Siemens Power Generation, Berlin	11/2006
Zikesch Armaturentechnik, Essen	11/2006
Wismar University of Applied Sciences, Seafaring Department	11/2006
BASF, Schwarzheide	12/2006
Enertech Energie und Technik, Radebeul	12/2006

2005

TUEV Nord, Hannover	01/2005
J.H.K Plant Engineering and Service, Bremerhaven	01/2005
Electrowatt-EKONO, Zurich, Switzerland	01/2005
FCIT, Stuttgart	01/2005
Energietechnik Leipzig (company license)	02/2005, 04/2005
	07/2005
eta Energieberatung, Pfaffenhofen	02/2005
FZR Forschungszentrum, Rossendorf/Dresden	04/2005
University of Saarbruecken	04/2005
Technical University of Dresden	04/2005
Professorship of Thermic Energy Machines and Plants	
Grenzebach BSH, Bad Hersfeld	04/2005
TUEV Nord, Hamburg	04/2005
Technical University of Dresden, Waste Management	05/2005
Siemens Power Generation, Goerlitz	05/2005
Duesseldorf University of Applied Sciences, Department of Mechanical Engineering and Process Engineering	05/2005
Redacom, Nidau, Switzerland	06/2005
Dumas Verfahrenstechnik, Hofheim	06/2005
Alensys Engineering, Erkner	07/2005
Stadtwerke Leipzig	07/2005
SaarEnergie, Saarbruecken	07/2005
ALSTOM ITC, Rugby, Great Britain	08/2005
Technical University of Cottbus, Chair in Power Plant Engineering	08/2005
Vattenfall Europe, Berlin (group license)	08/2005
Technical University of Berlin	10/2005
Basel University of Applied Sciences, Department of Mechanical Engineering, Switzerland	10/2005

Midiplan, Bietigheim-Bissingen	11/2005
Technical University of Freiberg, Chair in Hydrogeology	11/2005
STORA ENSO Sachsen, Eilenburg	12/2005
Energieversorgung Halle (company license)	12/2005
KEMA IEV, Dresden	12/2005

2004

Vattenfall Europe (group license)	01/2004
TUEV Nord, Hamburg	01/2004
University of Stuttgart, Institute of Thermodynamics and Heat Engineering	02/2004
MAN B&W Diesel A/S, Copenhagen, Denmark	02/2004
Siemens AG Power Generation, Erlangen	02/2004
Ulm University of Applied Sciences	03/2004
Visteon, Kerpen	03/2004, 10/2004
Technical University of Dresden,	
Professorship of Thermic Energy Machines and Plants	04/2004
Rerum Cognitio, Zwickau	04/2004
University of Saarbruecken	04/2004
Grenzebach BSH, Bad Hersfeld	04/2004
SOFBID Zwingenberg (general EBSILON program license)	04/2004
EnBW Energy Solutions, Stuttgart	05/2004
HEW-Kraftwerk, Tiefstack	06/2004
h s energieanlagen, Freising	07/2004
FCIT, Stuttgart	08/2004
Physikalisch Technische Bundesanstalt (PTB), Braunschweig	08/2004
Mainova Frankfurt	08/2004
Rietschle Energieplaner, Winterthur, Switzerland	08/2004
MAN Turbo Machines, Oberhausen	09/2004
TUEV Sued, Dresden	10/2004
STEAG Kraftwerk, Herne	10/2004, 12/2004
University of Weimar	10/2004
energeticals (e-concept), Munich	11/2004
SorTech, Halle	11/2004
Enertech EUT, Radebeul (company license)	11/2004
Munich University of Applied Sciences	12/2004
STORA ENSO Sachsen, Eilenburg	12/2004
Technical University of Cottbus, Chair in Power Plant Engineering	12/2004
Freudenberg Service, Weinheim	12/2004

2003

Paper Factory, Utzenstorf, Switzerland	01/2003
MAB Plant Engineering, Vienna, Austria	01/2003

Wulff Energy Systems, Husum	01/2003
Technip Benelux BV, Zoetermeer, Netherlands	01/2003
ALSTOM Power, Baden, Switzerland	01/2003, 07/2003
VER, Dresden	02/2003
Rietschle Energieplaner, Winterthur, Switzerland	02/2003
DLR, Leupholdhausen	04/2003
Emden University of Applied Sciences, Department of Technology	05/2003
Petterssson+Ahrends, Ober-Moerlen	05/2003
SOFBID ,Zwingenberg (general EBSILON program license)	05/2003
Ingenieurbuero Ostendorf, Gummersbach	05/2003
TUEV Nord, Hamburg	06/2003
Muenstermann GmbH, Telgte-Westbevern	06/2003
University of Cali, Colombia	07/2003
Atlas-Stord, Rodovre, Denmark	08/2003
ENERKO, Aldenhoven	08/2003
STEAG RKB, Leuna	08/2003
eta Energieberatung, Pfaffenhofen	08/2003
exergie, Dresden	09/2003
AWTEC, Zurich, Switzerland	09/2003
Energie, Timelkam, Austria	09/2003
Electrowatt-EKONO, Zurich, Switzerland	09/2003
LG, Annaberg-Buchholz	10/2003
FZR Forschungszentrum, Rossendorf/Dresden	10/2003
EnviCon & Plant Engineering, Nuremberg	11/2003
Visteon, Kerpen	11/2003
VEO Vulkan Energiewirtschaft Oderbruecke, Eisenhuettenstadt	11/2003
Stadtwerke Hannover	11/2003
SaarEnergie, Saarbruecken	11/2003
Fraunhofer-Gesellschaft, Munich	12/2003
Erfurt University of Applied Sciences, Department of Supply Engineering	12/2003
SorTech, Freiburg	12/2003
Mainova, Frankfurt	12/2003
Energieversorgung Halle	12/2003

2002

Hamilton Medical AG, Rhaezuens, Switzerland	01/2002
Bochum University of Applied Sciences, Department of Thermo- and Fluid Dynamics	01/2002
SAAS, Possendorf/Dresden	02/2002
Siemens, Karlsruhe (general license for the WinIS information system)	02/2002

FZR Forschungszentrum, Rossendorf/Dresden	03/2002
CompAir, Simmern	03/2002
GKS Gemeinschaftskraftwerk, Schweinfurt	04/2002
ALSTOM Power Baden, Switzerland (group licenses)	05/2002
InfraServ, Gendorf	05/2002
SoftSolutions, Muehlhausen (company license)	05/2002
DREWAG, Dresden (company license)	05/2002
SOFBID, Zwingenberg	06/2002
(general EBSILON program license)	
Kleemann Engineering, Dresden	06/2002
Caliqua, Basel, Switzerland (company license)	07/2002
PCK Raffinerie, Schwedt (group license)	07/2002
Fischer-Uhrig Engineering, Berlin	08/2002
Fichtner Consulting & IT, Stuttgart	08/2002
(company licenses and distribution)	
Stadtwerke Duisburg	08/2002
Stadtwerke Hannover	09/2002
Siemens Power Generation, Goerlitz	10/2002
Energieversorgung Halle (company license)	10/2002
Bayer, Leverkusen	11/2002
Dillinger Huette, Dillingen	11/2002
G.U.N.T. Geraetebau, Barsbuettel	12/2002
(general license and training test benches)	
VEAG, Berlin (group license)	12/2002

2001

ALSTOM Power, Baden, Switzerland	01/2001, 06/2001 12/2001
KW2 B. V., Amersfoot, Netherlands	01/2001, 11/2001
Eco Design, Saitamaken, Japan	01/2001
M&M Turbine Technology, Bielefeld	01/2001, 09/2001
MVV Energie, Mannheim	02/2001
Technical University of Dresden, Department of Power Machinery and Plants	02/2001
PREUSSAG NOELL, Wuerzburg	03/2001
Fichtner Consulting & IT Stuttgart	04/2001
(company licenses and distribution)	
Muenstermann GmbH, Telgte-Westbevern	05/2001
SaarEnergie, Saarbruecken	05/2001
Siemens, Karlsruhe	08/2001
(general license for the WinIS information system)	
Neusiedler AG, Ulmerfeld, Austria	09/2001

h s energieranlagen, Freising	09/2001
Electrowatt-EKONO, Zurich, Switzerland	09/2001
IPM Zittau/Goerlitz University of Applied Sciences (general license)	10/2001
eta Energieberatung, Pfaffenhofen	11/2001
ALSTOM Power Baden, Switzerland	12/2001
VEAG, Berlin (group license)	12/2001

2000

SOFBID, Zwingenberg	01/2000
(general EBSILON program license)	
AG KKK - PGW Turbo, Leipzig	01/2000
PREUSSAG NOELL, Wuerzburg	01/2000
M&M Turbine Technology, Bielefeld	01/2000
IBR Engineering Reis, Nittendorf-Undorf	02/2000
GK, Hannover	03/2000
KRUPP-UHDE, Dortmund (company license)	03/2000
UMAG W. UDE, Husum	03/2000
VEAG, Berlin (group license)	03/2000
Thinius Engineering, Erkrath	04/2000
SaarEnergie, Saarbruecken	05/2000, 08/2000
DVO Data Processing Service, Oberhausen	05/2000
RWTH Aachen University	06/2000
VAUP Process Automation, Landau	08/2000
Knuerr-Lommatec, Lommatzsch	09/2000
AVACON, Helmstedt	10/2000
Compania Electrica, Bogota, Colombia	10/2000
G.U.N.T. Geraetebau, Barsbuettel	11/2000
(general license for training test benches)	
Steinhaus Informationssysteme, Datteln	12/2000
(general license for process data software)	

1999

Bayernwerk, Munich	01/1999
DREWAG, Dresden (company license)	02/1999
KEMA IEV, Dresden	03/1999
Regensburg University of Applied Sciences	04/1999
Fichtner Consulting & IT, Stuttgart	07/1999
(company licenses and distribution)	
Technical University of Cottbus, Chair in Power Plant Engineering	07/1999
Technical University of Graz, Department of Thermal Engineering, Austria	11/1999
Ostendorf Engineering, Gummersbach	12/1999

1998

Technical University of Cottbus, Chair in Power Plant Engineering	05/1998
Fichtner Consulting & IT (CADIS information systems) Stuttgart (general KPRO program license)	05/1998
M&M Turbine Technology Bielefeld	06/1998
B+H Software Engineering Stuttgart	08/1998
Alfa Engineering, Switzerland	09/1998
VEAG Berlin (group license)	09/1998
NUTEC Engineering, Bisikon, Switzerland	10/1998
SCA Hygiene Products, Munich	10/1998
RWE Energie, Neurath	10/1998
Wilhelmshaven University of Applied Sciences	10/1998
BASF, Ludwigshafen (group license)	11/1998
Energieversorgung, Offenbach	11/1998

1997

Gerb, Dresden	06/1997
Siemens Power Generation, Goerlitz	07/1997